



FEEL THE SW
DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.



PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION
GLOVES WITH SUSTAINABLE ECOTEK TECHNOLOGY

**ENGINEERED FOR LIFE SCIENCE, THESE
DURABLE GLOVES PROTECT FROM CHEMICALS
WITHOUT SACRIFICING GRIP OR DEXTERITY**

- EcoTek® Sustainable Technology*
- Tested for use with chemotherapy drugs
- Extended-cuff for additional protection
- Silicone-free to prevent contamination
- Exceeds 1.5 AQL laboratory standards

PF

PF-12TL

| WEIGHT | LENGTH | THICKNESS | FEATURES | COLOR |
|---------------------------|-----------|-------------|--|----------|
| 10.7g (large size) | 12.0" | 6.2 mil | EcoTek® Clean Washed Air Inspected | TEAL |


ECOTEK



Fully textured
surface for wet
and dry grip

Extended-cuff
for added coverage
and protection

Tear-resistant
beaded cuff for
easy donning

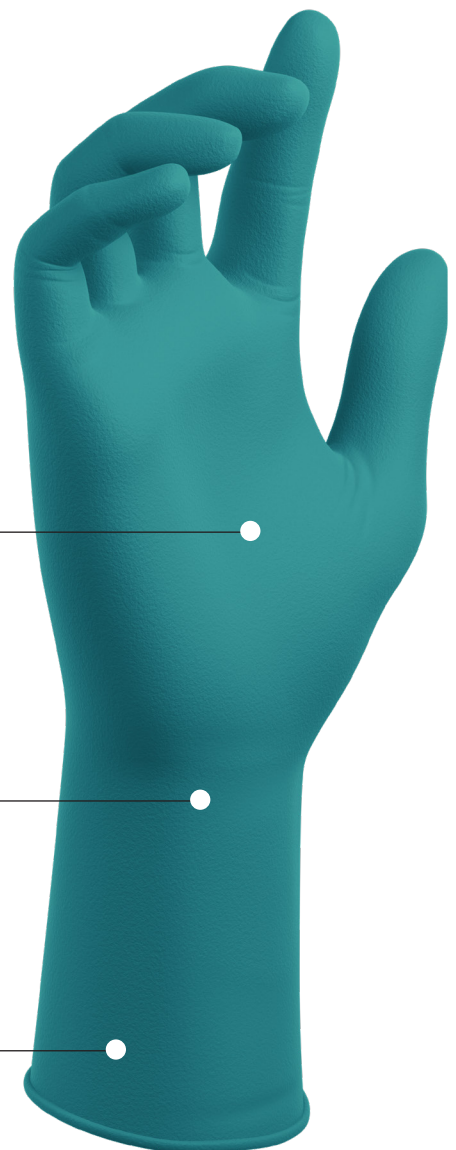

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2023 SW. All rights reserved.



TECHNICAL DATA



PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION
GLOVES WITH SUSTAINABLE ECOTEK TECHNOLOGY

PRODUCT DESCRIPTION

SPECIFICATIONS

| | | | |
|----------------|--------|------------------|--------|
| PRODUCT | | PowerForm® | |
| GRADE | | Powder-Free Exam | |
| MATERIAL | | Nitrile | |
| THICKNESS | FINGER | 7.1mil | 0.18mm |
| | PALM | 6.2mil | 0.16mm |
| | CUFF | 4.3mil | 0.11mm |
| COLOR | | Teal | |
| SURFACE | | Fully Textured | |
| LENGTH | | 12.0" | 305mm |
| WEIGHT | | 10.7g | |
| FIT TYPE | | Ambidextrous | |
| CUFF TYPE | | Beaded | |
| WATERTIGHT AQL | | 1.5 | |
| ORIGIN COUNTRY | | China | |

PHYSICAL PROPERTIES

| | PRE-AGING | POST-AGING |
|-------------------|-----------|------------|
| TENSILE STRENGTH: | 21 MPa | 20 MPa |
| ELONGATION: | 575% | 560% |

INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

100% Air Inspected

Clean Washed




* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006

EU 2016/425
CAT III Complex Design
UL NFPA 1999-2018
FDA 21 CFR 177.2600

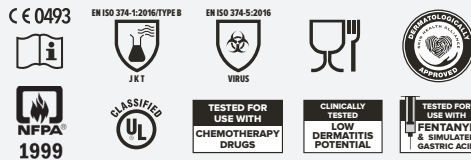

Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

| ITEM NO. | SIZE | PALM WIDTH | PACKAGING |
|----------|--------------|------------|-------------------------------------|
| N127361 | XS 5½ – 6 | 3.0" 76mm | 50 gloves per box 10 boxes per case |
| N127362 | S 6½ – 7 | 3.4" 85mm | 50 gloves per box 10 boxes per case |
| N127363 | M 7½ – 8 | 3.8" 96mm | 50 gloves per box 10 boxes per case |
| N127364 | L 8½ – 9 | 4.5" 114mm | 50 gloves per box 10 boxes per case |
| N127365 | XL 9½ – 10 | 4.9" 125mm | 50 gloves per box 10 boxes per case |
| N127366 | 2XL 10½ – 11 | 5.2" 133mm | 50 gloves per box 10 boxes per case |

APPLICATIONS

For Medical Use
Chemical Handling
Clinical
First Responder EMS
Food Processing
Handling and Packaging Class 1
Medical Devices
Laboratory
Light Chemical Mixing
Pharma Production

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N12736X0323



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2023 SW. All rights reserved.



*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.