



FEEL THE SW DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.


PowerForm®

PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION GLOVES WITH SUSTAINABLE ECOTEK TECHNOLOGY

ENGINEERED FOR LIFE SCIENCE, THESE DURABLE GLOVES PROTECT FROM CHEMICALS WITHOUT SACRIFICING GRIP OR DEXTERITY

- EcoTek® Sustainability Technology accelerates landfill breakdown without any performance loss*
- Tested for use with chemotherapy drugs
- Extended-cuff for additional protection
- Silicone-free to prevent contamination
- Exceeds 1.5 AQL laboratory standards

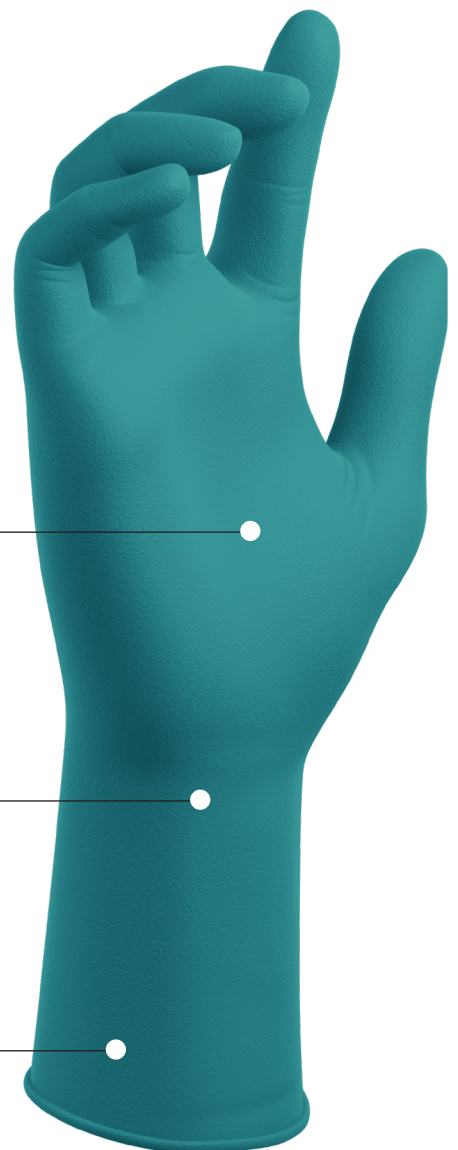





Fully textured surface for wet and dry grip

Extended-cuff for added coverage and protection

Tear-resistant beaded cuff for easy donning

PF **PF-12TL**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 10.7g (large size)	 12.0"	 6.2 mil	EcoTek® Clean Washed Air Inspected	 TEAL

ECOTEK



Feel the difference.™

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2023 SW. All rights reserved.



WOMEN OWNED™




TECHNICAL DATA



PF-12TL

POWDER-FREE NITRILE EXTENDED-CUFF EXAMINATION GLOVES WITH SUSTAINABLE ECOTEK TECHNOLOGY

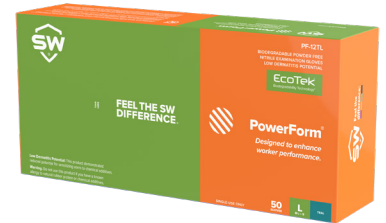

PRODUCT DESCRIPTION

SPECIFICATIONS	
PRODUCT	PowerForm®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS	FINGER 7.1mil 0.18mm
	PALM 6.2mil 0.16mm
	CUFF 4.3mil 0.11mm
COLOR	Teal
SURFACE	Fully Textured
LENGTH	12.0" 305mm
WEIGHT	10.7g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	21 MPa	20 MPa
ELONGATION:	575%	560%


INTEGRATED TECHNOLOGIES
ECOTEK Sustainability Technology: 92.6% waste reduction in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.*
 100% Air Inspected
 Clean Washed

* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
 EN 455-2000-2015
 ASTM D6319-19
 ASTM D6978-05 (2019)
 ASTM F1671-13
 ASTM F739-12
 Reach EU 1907/2006

EU 2016/425
 CAT III Complex Design
 UL NFFPA 1999-2018
 FDA 21 CFR 177.2600

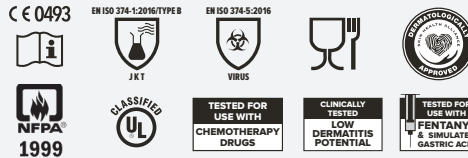

Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N127361	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
N127362	S 6½ – 7	3.4" 85mm	50 gloves per box 10 boxes per case
N127363	M 7½ – 8	3.8" 96mm	50 gloves per box 10 boxes per case
N127364	L 8½ – 9	4.5" 114mm	50 gloves per box 10 boxes per case
N127365	XL 9½ – 10	4.9" 125mm	50 gloves per box 10 boxes per case
N127366	2XL 10½ – 11	5.2" 133mm	50 gloves per box 10 boxes per case

APPLICATIONS

- For Medical Use
- Chemical Handling
- Clinical
- First Responder EMS
- Food Processing
- Handling and Packaging Class 1
- Medical Devices
- Laboratory
- Light Chemical Mixing
- Pharma Production

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



R_N12736X0323



SW®
 33278 Central Avenue, Unit 102, Union City, CA 94587, USA
 Tel: +1.510.429.8692 | Fax: +1.510.487.5347
 Trademarks and registered trademarks are the property of SW and its affiliates.
 ©2023 SW. All rights reserved.



*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.