



FEEL THE SW  
DIFFERENCE®

# DESIGNED TO ENHANCE WORKER PERFORMANCE.



**PowerForm®**

**PF-95GY**

SWEAT ABSORBING EXAMINATION ECOTEK  
SUSTAINABLE NITRILE SINGLE-USE GLOVES\*


**WORK WITH CONFIDENCE AND COMFORT  
IN SUSTAINABLE GLOVES WITH EXCLUSIVE  
DRITEK SWEAT MANAGEMENT TECHNOLOGY\***

- DriTek® Comfort Technology with absorbent lining that wicks away moisture for all day comfort
- EcoTek® Sustainable Technology\*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

ANSI Level 1  
Puncture  
resistance

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

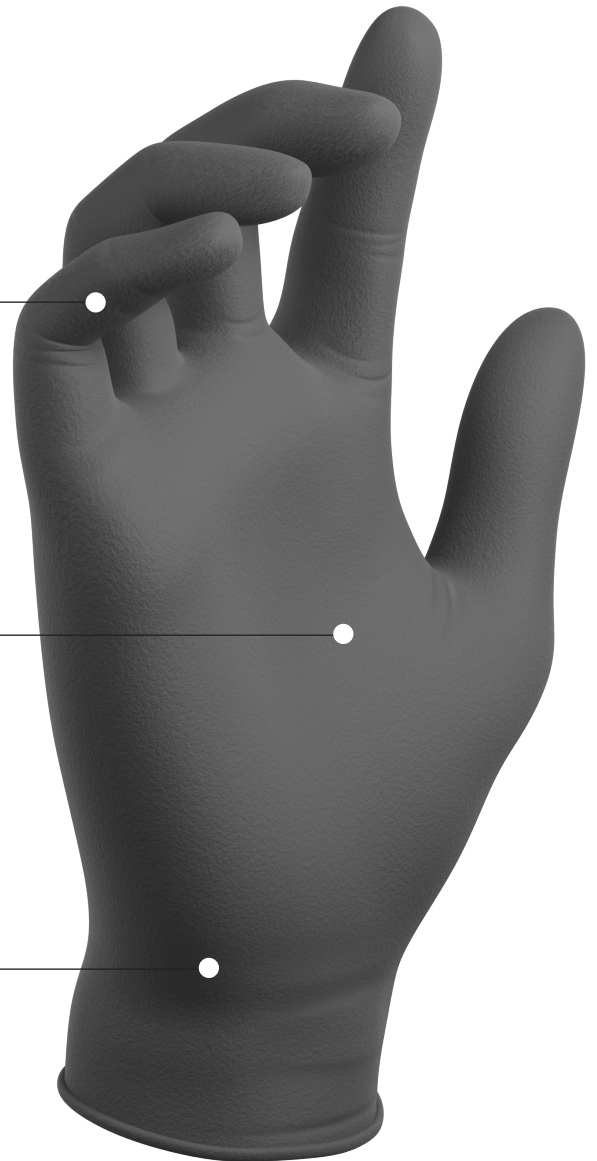

PF

PF-95GY

WEIGHT



(large size)

LENGTH



THICKNESS



FEATURES

DriTek®  
EcoTek®

COLOR

GRAY

ECOTEK



Feel the  
difference.™

SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.  
©2024 SW. All rights reserved.



WOMEN  
OWNED



## TECHNICAL DATA



### PF-95GY

SWEAT ABSORBING EXAMINATION ECOTEK  
SUSTAINABLE NITRILE SINGLE-USE GLOVES\*

## PRODUCT DESCRIPTION

### SPECIFICATIONS

PRODUCT		PowerForm®	
GRADE		Powder-Free Exam	
MATERIAL		Nitrile	
THICKNESS	FINGER	8.2mil	0.21mm
	PALM	6.2mil	0.16mm
	CUFF	5.9mil	0.15mm
COLOR		Gray	
SURFACE	OUTER	Fully Textured	
	INNER	DriTek®	
LENGTH		9.5"	242mm
WEIGHT		8.8g	
FIT TYPE		Ambidextrous	
CUFF TYPE		Beaded	
WATERTIGHT AQL		1.5	
ORIGIN COUNTRY		China	

### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	15 MPa	15 MPa
ELONGATION:	550%	500%

### INTEGRATED TECHNOLOGIES

**DRIOTEK** Comfort Technology:  
Advanced flock lining is a soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

**ECOTEK** Sustainable Technology: Product has been tested per ASTM D5526\*


100% Air Inspected



\* Specifications based on size Large glove

## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020	EU 2016/425
EN 455-2000-2015	ANSI/ISEA 105-2016
ASTM D6319-19	CAT III Complex Design
ASTM D6978-05 (2019)	FDA 21 CFR 177.2600
ASTM F1671-13	
ASTM F739-12	
Reach EU 1907/2006	

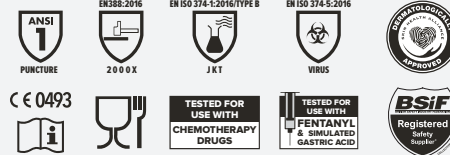

Please visit [swssglobal.com/symbols](http://swssglobal.com/symbols) for information on standards used on this document.

## ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260501	XS 5½ – 6	3.0" 75mm	50 gloves per box 10 boxes per case
N260502	S 6½ – 7	3.3" 85mm	50 gloves per box 10 boxes per case
N260503	M 7½ – 8	3.7" 95mm	50 gloves per box 10 boxes per case
N260504	L 8½ – 9	4.2" 107mm	50 gloves per box 10 boxes per case
N260505	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260506	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case

## APPLICATIONS

For Medical Use  
First Responder EMS  
Laboratory Cleaning

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N26050X0323



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2024 SW. All rights reserved.



\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swssglobal.com](mailto:cs@swssglobal.com).