



FEEL THE SW DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.

PowerForm®

PF-95GY

SWEAT ABSORBING EXAMINATION ECOTEK SUSTAINABLE NITRILE SINGLE-USE GLOVES*


WORK WITH CONFIDENCE AND COMFORT IN SUSTAINABLE GLOVES WITH EXCLUSIVE DRITEK SWEAT MANAGEMENT TECHNOLOGY*

- DriTek® Comfort Technology with absorbent lining that wicks away moisture for all day comfort
- EcoTek® Sustainable Technology*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards





ANSI Level 1 Puncture resistance

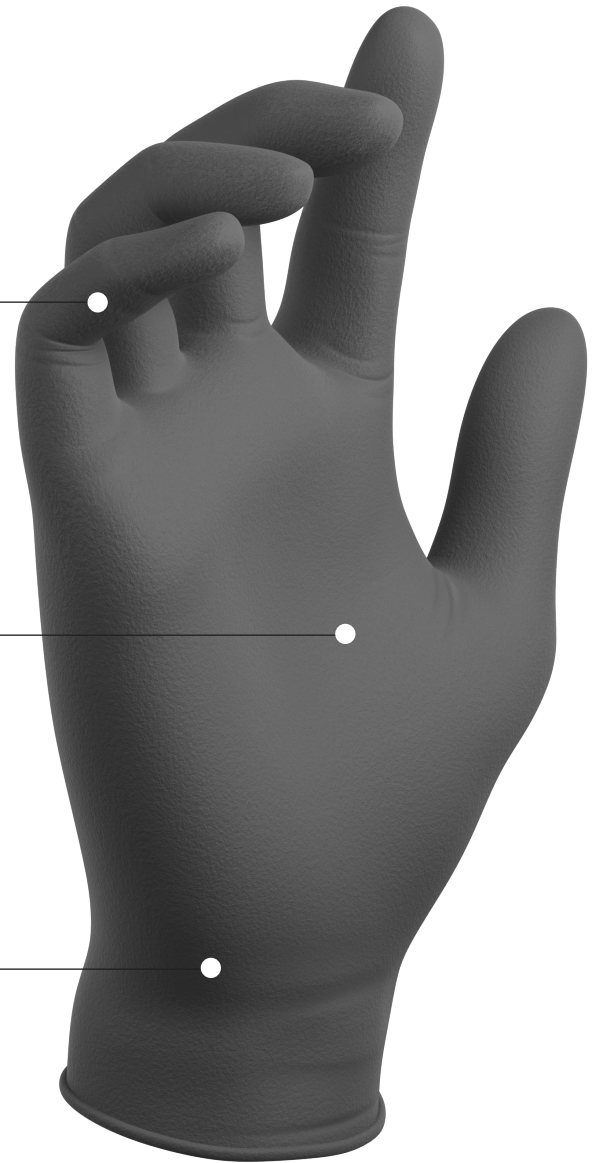Fully textured surface for wet and dry grip

Tear-resistant beaded cuff for easy donning



PF **PF-95GY**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 8.8g (large size)	 9.5"	 6.2 mil	DriTek® EcoTek®	 GRAY

ECOTEK



Feel the difference.™

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2023 SW. All rights reserved.



WOMEN OWNED



TECHNICAL DATA



PF-95GY
SWEAT ABSORBING EXAMINATION ECOTEK
SUSTAINABLE NITRILE SINGLE-USE GLOVES*



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	PowerForm®		
GRADE	Powder-Free Exam		
MATERIAL	Nitrile		
THICKNESS	FINGER	8.2mil	0.21mm
	PALM	6.2mil	0.16mm
	CUFF	5.9mil	0.15mm
COLOR	Gray		
SURFACE	OUTER	Fully Textured	
	INNER	DriTek®	
LENGTH	9.5"	242mm	
WEIGHT	8.8g		
FIT TYPE	Ambidextrous		
CUFF TYPE	Beaded		
WATERTIGHT AQL	1.5		
ORIGIN COUNTRY	China		

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	15 MPa	15 MPa
ELONGATION:	550%	500%

INTEGRATED TECHNOLOGIES

DRITEK Comfort Technology:
 Advanced flock lining is a soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

100% Air Inspected




* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
 EN 455-2000-2015
 ASTM D6319-19
 ASTM D6978-05 (2019)
 ASTM F1671-13
 ASTM F739-12
 Reach EU 1907/2006

EU 2016/425
 ANSI/ISEA 105-2016
 CAT III Complex Design
 FDA 21 CFR 177.2600

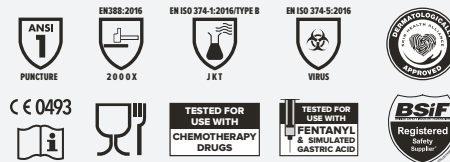

Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260501	XS 6½ – 7	3.0" 75mm	50 gloves per box 10 boxes per case
N260502	S 6½ – 7	3.3" 85mm	50 gloves per box 10 boxes per case
N260503	M 7½ – 8	3.7" 95mm	50 gloves per box 10 boxes per case
N260504	L 8½ – 9	4.2" 107mm	50 gloves per box 10 boxes per case
N260505	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260506	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case

APPLICATIONS

For Medical Use
 First Responder EMS
 Laboratory Cleaning

Keep out of sunlight. Store in a cool, dry place.
 Keep away from sources of ozone or ignition.



R_N26050X0323



SW®
 33278 Central Avenue, Unit 102, Union City, CA 94587, USA
 Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
 ©2023 SW. All rights reserved.



*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.