



FEEL THE SW DIFFERENCE<sup>®</sup>

# DESIGNED TO ENHANCE WORKER PERFORMANCE.

## PowerForm<sup>®</sup>

**PF-95GY**

SWEAT ABSORBING EXAMINATION ECOTEK SUSTAINABLE NITRILE SINGLE-USE GLOVES\*


**WORK WITH CONFIDENCE AND COMFORT IN SUSTAINABLE GLOVES WITH EXCLUSIVE DRITEK SWEAT MANAGEMENT TECHNOLOGY\***

- DriTek<sup>®</sup> Comfort Technology with absorbent lining that wicks away moisture for all day comfort
- EcoTek<sup>®</sup> Sustainable Technology\*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards





ANSI Level 1 Puncture resistance

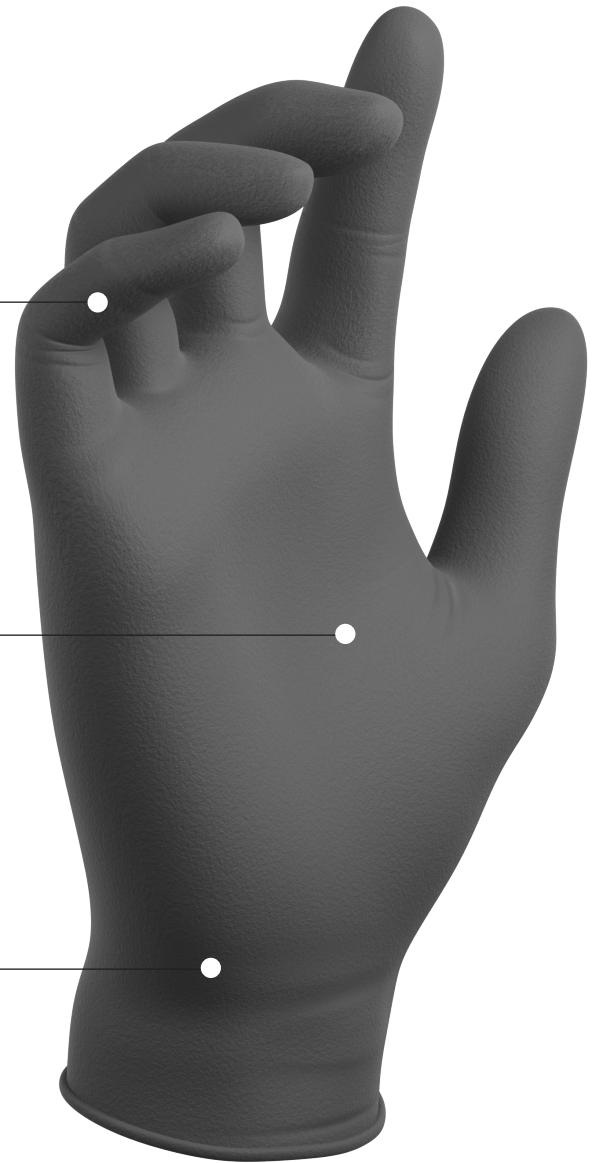Fully textured surface for wet and dry grip

Tear-resistant beaded cuff for easy donning



**PF** **PF-95GY**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 8.8g (large size)	 9.5"	 6.2 mil	DriTek <sup>®</sup> EcoTek <sup>®</sup>	 GRAY

**ECOTEK**



SW<sup>®</sup>  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



# TECHNICAL DATA



## PF-95GY

SWEAT ABSORBING EXAMINATION ECOTEK  
SUSTAINABLE NITRILE SINGLE-USE GLOVES\*



### PRODUCT DESCRIPTION

#### SPECIFICATIONS

PRODUCT	PowerForm®		
GRADE	Powder-Free Exam		
MATERIAL	Nitrile		
THICKNESS	FINGER	8.2mil	0.21mm
	PALM	6.2mil	0.16mm
	CUFF	5.9mil	0.15mm
COLOR	Gray		
SURFACE	OUTER	Fully Textured	
	INNER	DriTek®	
LENGTH	9.5"	242mm	
WEIGHT	8.8g		
FIT TYPE	Ambidextrous		
CUFF TYPE	Beaded		
WATERTIGHT AQL	1.5		
ORIGIN COUNTRY	China/Malaysia		

#### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	15 MPa	15 MPa
ELONGATION:	550%	500%

#### INTEGRATED TECHNOLOGIES

**DRITEK** Comfort Technology:  
Advanced flock lining is a soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

**ECOTEK** Sustainable Technology: Product has been tested per ASTM D5526\*


100% Air Inspected

\* Specifications based on size Large glove

### STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319-19  
ASTM D6978-05 (2019)  
ASTM F1671-13  
ASTM F739-12  
Reach EU 1907/2006

EU 2016/425  
ANSI/ISEA 105-2016  
CAT III Complex Design  
FDA 21 CFR 177.2600

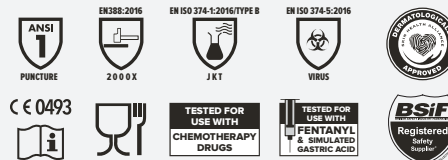

Please visit [swssglobal.com/symbols](http://swssglobal.com/symbols) for information on standards used on this document.

### ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260501	XS 5½ – 6	3.0" 75mm	50 gloves per box 10 boxes per case
N260502	S 6½ – 7	3.3" 85mm	50 gloves per box 10 boxes per case
N260503	M 7½ – 8	3.7" 95mm	50 gloves per box 10 boxes per case
N260504	L 8½ – 9	4.2" 107mm	50 gloves per box 10 boxes per case
N260505	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260506	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case

### TECHNOLOGY PATENTS

US 12,201,172 B2  
Multiple U.S. and other patents pending

### APPLICATIONS

For Medical Use  
First Responder EMS  
Laboratory Cleaning

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N26050X0225



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2025 SW. All rights reserved.



\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swssglobal.com](mailto:cs@swssglobal.com).