



FEEL THE SW
DIFFERENCE.®

DESIGNED TO ENHANCE WORKER PERFORMANCE.



PowerForm®

PF-95TL

POWDER-FREE ECOTEK SUSTAINABLE
NITRILE EXAMINATION GLOVES*

**VERSATILE SUSTAINABLE 5 MIL SINGLE-USE
GLOVE COMBINES MAXIMUM COMFORT AND
CONTROL WITH HIGH-QUALITY CONSTRUCTION**

- EcoTek® Sustainable Technology*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

PF

PF-95TL

| WEIGHT | LENGTH | THICKNESS | FEATURES | COLOR |
|--------------------------|----------|-------------|--|----------|
| 6.5g (large size) | 9.5" | 5.0 mil | EcoTek® Clean Washed Air Inspected | TEAL |


ECOTEK



Finger textured
surface for wet
and dry grip

Optimal
thickness for
durability and
tactile sensitivity

Tear-resistant
beaded cuff for
easy donning

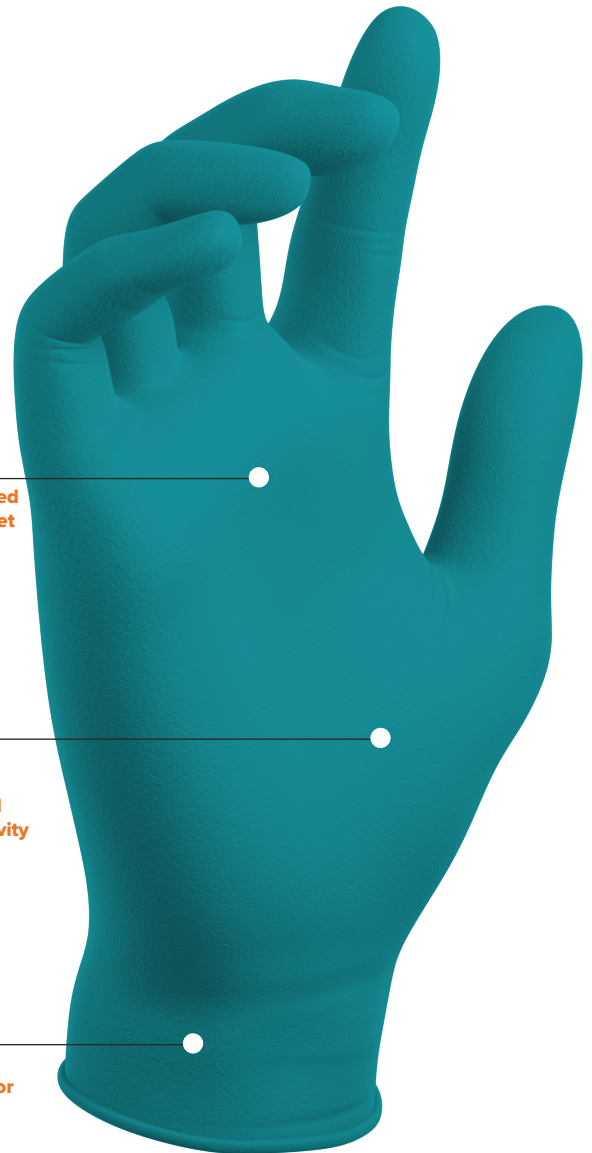

Feel the
difference.™

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2024 SW. All rights reserved.



WOMEN
OWNED



TECHNICAL DATA



PowerForm®

PF-95TL

**POWDER-FREE ECOTEK SUSTAINABLE
NITRILE EXAMINATION GLOVES***

PRODUCT DESCRIPTION

SPECIFICATIONS

| | | | |
|----------------|--------|-------------------|--------|
| PRODUCT | | PowerForm® | |
| GRADE | | Powder-Free Exam | |
| MATERIAL | | Nitrile | |
| THICKNESS | FINGER | 5.8mil | 0.15mm |
| | PALM | 5.0mil | 0.13mm |
| | CUFF | 3.9mil | 0.10mm |
| COLOR | | Teal | |
| SURFACE | | Finger Textured | |
| LENGTH | | 9.5" | 242mm |
| WEIGHT | | 6.5g | |
| FIT TYPE | | Ambidextrous | |
| CUFF TYPE | | Beaded | |
| WATERTIGHT AQL | | 1.5 | |
| ORIGIN COUNTRY | | Malaysia/Thailand | |

PHYSICAL PROPERTIES

| | PRE-AGING | POST-AGING |
|--------------------|-----------|------------|
| TENSILE | | |
| STRENGTH: | 21 MPA | 20 MPA |
| ELONGATION: | 560% | 540% |

INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

100% Air Inspected

Clean Washed



* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006

EU 2016/425
CAT III Complex Design



Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

| ITEM NO. | SIZE | PALM WIDTH | PACKAGING |
|----------|--------------|------------|--------------------------------------|
| N200361 | XS 5½ – 6 | 3.0" 75mm | 100 gloves per box 10 boxes per case |
| N200362 | S 6½ – 7 | 3.5" 89mm | 100 gloves per box 10 boxes per case |
| N200363 | M 7½ – 8 | 3.8" 98mm | 100 gloves per box 10 boxes per case |
| N200364 | L 8½ – 9 | 4.3" 108mm | 100 gloves per box 10 boxes per case |
| N200365 | XL 9½ – 10 | 4.6" 116mm | 100 gloves per box 10 boxes per case |
| N200366 | 2XL 10½ – 11 | 4.9" 124mm | 100 gloves per box 10 boxes per case |

APPLICATIONS

For Medical Use
Chemical Handling

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N20036X0323



Feel the difference.™

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2024 SW. All rights reserved.



*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.