



NF15-RD-ECO-GR

ISO 374-1:2016/TYPE A

EN388:2016

EN374-5:2016



A J K L M N O P T



4 1 0 1 X



ABRASION



PUNCTURE

# NEWTRILE®

## HANDLE THE HOSTILE

EcoTek®  
Sustainable Technology



### Protection for the Most Demanding Environments

The industry's first reusable chemical protection gloves with EcoTek® Sustainable Technology. Advanced chemical protection now has a smaller carbon footprint.



# NEWTRILE

Nitrile Chemical Protection and Performance

featuring  
**EcoTek®**

## NF15-RD-ECO-GR

15 MIL FLOCK-LINED NITRILE CHEMICAL RESISTANT GLOVES



**Flock-lined, hand specific, nitrile rubber chemical resistance gloves, case hardened for enhanced performance**


- 15 mil thick and 13 inch cuff length for added protection
- EcoTek® Sustainable Technology: Product has been tested per ASTM D5526\*
- Embossed raised-diamond surface for wet/dry grip
- Case hardened for enhanced physical and chemical performance while providing easier and more comfortable donning and doffing

### Ideal Applications:

- Boat Manufacturing
- Chemical
- Food
- Housekeeping
- Janitorial
- Machinery & Equipment
- Transportation

SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.  
©2023 SW. All rights reserved.

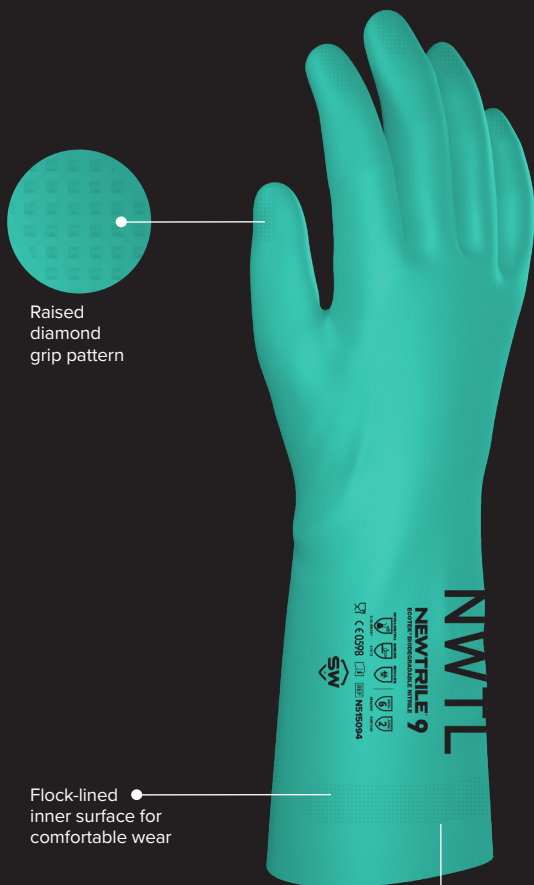

Raised diamond grip pattern

Flock-lined inner surface for comfortable wear

13 inch cuff for added coverage and protection

### PRODUCT ATTRIBUTES

SPECIFICATIONS	NF15-RD-ECO-GR
PRODUCT TYPE:	Chemical-Resistant
PUNCTURE LEVEL:	ANSI 2 — EN388 1
ABRASION LEVEL:	ANSI 6 — EN388 4
LINER MATERIAL:	Advanced Flocking
MATERIAL:	Nitrile with EcoTek®
COLOR:	Green
GRIP FINISH:	Raised Diamond
CONSTRUCTION:	Unsupported
FIT TYPE:	Hand Specific
CUFF STYLE:	Straight
THICKNESS:	15 mil
LENGTH:	13"
ORIGIN COUNTRY:	Sri Lanka

### STANDARDS & CERTIFICATIONS

**FDA 21 CFR 177.2600**  
COMPONENT MATERIALS  
COMPLY WITH FDA REGULATIONS  
FOR FOOD CONTACT

Please visit [safety.com/symbols](http://safety.com/symbols) for information on standards used in this document.



### NF15-RD-ECO-GR ORDERING INFORMATION

N515092	S: 7
N515093	M: 8
N515094	L: 9
N515095	XL: 10
N515096	2XL: 11

12 Pairs per Bag, 12 Bags per Case

\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to [cs@swssglobal.com](mailto:cs@swssglobal.com).

For samples visit  
[swssglobal.com/newtrile](http://swssglobal.com/newtrile)