



FEEL THE SW  
DIFFERENCE®

# DESIGNED TO ENHANCE WORKER PERFORMANCE.



## PowerForm®

PF-95LG

POWDER-FREE NITRILE EXAMINATION GLOVES  
WITH ECOTEK SUSTAINABLE TECHNOLOGY

**DESIGNED FOR FOOD HANDLING, THESE  
GLOVES PROVIDE EXCELLENT DEXTERITY  
AND GRIP WHILE HELPING TO PREVENT  
CONTAMINATION**

- EcoTek® Sustainable Technology\*
- Silicone-free eliminates the risk of contamination in sensitive food and industrial processes
- Exceeds 1.5 AQL standards and provides consistent reliability with reduced risk of defects
- Comfortable ergonomic fit is designed for all-day wear with excellent dexterity and tactile sensitivity


| PF                       |          | PF-95LG                |          |                 |  |
|--------------------------|----------|------------------------|----------|-----------------|--|
| WEIGHT                   | LENGTH   | THICKNESS              | FEATURES | COLOR           |  |
| <br>6.5g<br>(large size) | <br>9.5" | <br>5.5 mil<br>5.0 mil | EcoTek®  | <br>LIGHT GREEN |  |



Finger textured  
surface for wet  
and dry grip

Optimal thickness  
for durability and  
tactile sensitivity

Tear-resistant  
beaded cuff for  
easy donning

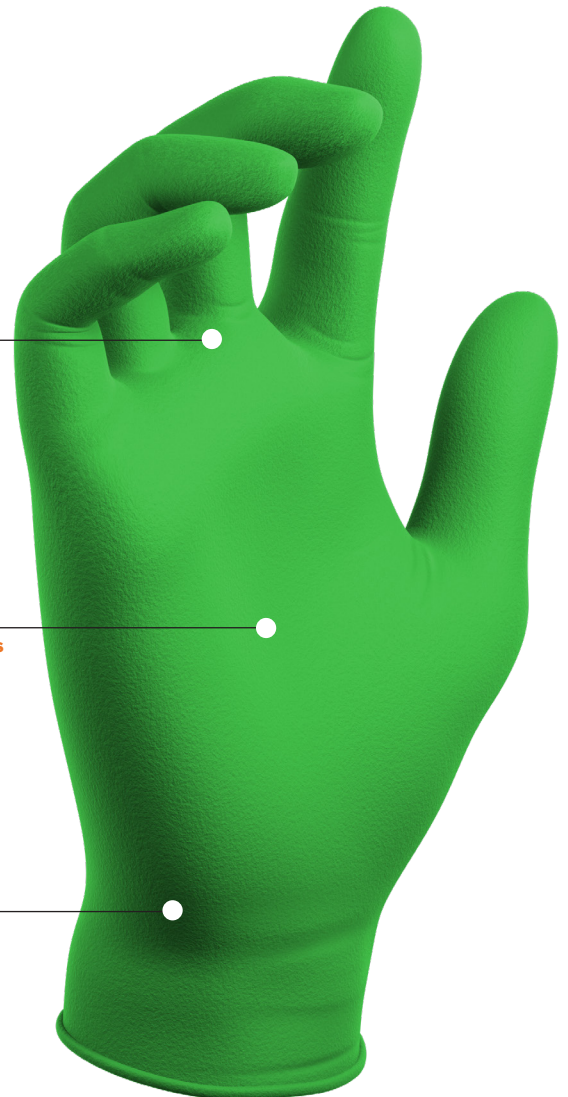

Feel the  
difference.™

SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347 | Website: swsglobal.com  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2026 SW. All rights reserved.



## TECHNICAL DATA



### PF-95LG

POWDER-FREE NITRILE EXAMINATION GLOVES WITH ECOTEK SUSTAINABLE TECHNOLOGY

### POLYCARBIN

THIS GLOVE IS RECYCLABLE THROUGH POLYCARBIN'S LAB RECYCLING PROGRAM.

## PRODUCT DESCRIPTION

### SPECIFICATIONS

|                |                  |        |        |
|----------------|------------------|--------|--------|
| PRODUCT        | PowerForm®       |        |        |
| GRADE          | Powder-Free Exam |        |        |
| MATERIAL       | Nitrile          |        |        |
| THICKNESS      | FINGER           | 5.5mil | 0.15mm |
|                | PALM             | 5.0mil | 0.13mm |
|                | CUFF             | 4.3mil | 0.11mm |
| COLOR          | Light Green      |        |        |
| SURFACE        | Finger Textured  |        |        |
| LENGTH         | 9.5" 240mm       |        |        |
| WEIGHT         | 6.5g             |        |        |
| FIT TYPE       | Ambidextrous     |        |        |
| CUFF TYPE      | Beaded           |        |        |
| WATERTIGHT AQL | 1.5              |        |        |
| ORIGIN COUNTRY | Malaysia         |        |        |

Specifications based on size Large glove

### PHYSICAL PROPERTIES

|                   | PRE-AGING | POST-AGING |
|-------------------|-----------|------------|
| TENSILE STRENGTH: | 14 MPa    | 14 MPa     |
| ELONGATION:       | 500%      | 400%       |

### INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested by an independent laboratory\*



## STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319  
Reach EU 1907/2006  
EU 2016/425

EN ISO 374-1:2016 TYPE B



EN ISO 374-5:2016



Please visit [swssglobal.com/symbols](http://swssglobal.com/symbols) for information on standards used on this document.

## APPLICATIONS

Food Handling  
Food Processing  
Industrial Tasks

## ORDERING

| ITEM NO. | SIZE         | PALM WIDTH | PACKAGING                            |
|----------|--------------|------------|--------------------------------------|
| N200412  | S 6½ – 7     | 3.1" 80mm  | 100 gloves per box 10 boxes per case |
| N200413  | M 7½ – 8     | 3.4" 87mm  | 100 gloves per box 10 boxes per case |
| N200414  | L 8½ – 9     | 4.0" 101mm | 100 gloves per box 10 boxes per case |
| N200415  | XL 9½ – 10   | 4.5" 114mm | 100 gloves per box 10 boxes per case |
| N200416  | 2XL 10½ – 11 | 4.8" 123mm | 100 gloves per box 10 boxes per case |

\* EcoTek gloves are tested in an independent laboratory for their Anaerobic Biodegradation potential Under Accelerated Landfill Conditions. Results show 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the testing, contact [cs@swssglobal.com](mailto:cs@swssglobal.com).

Keep out of sunlight. Store in a cool, dry place.  
Keep away from sources of ozone or ignition.



R\_N20041X0126



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347 | Website: [swssglobal.com](http://swssglobal.com)  
Trademarks and registered trademarks are the property of SW and its affiliates.  
©2026 SW. All rights reserved.



This product does not contain substances of very high concern (SVHCs), restricted substances, carcinogenic, mutagenic, or reprotoxic (CMR) substances, endocrine disruptors, tissues or cells of human or animal origin, or intentionally added nanomaterials. This information is provided for biocompatibility review and reporting purposes.