



FEEL THE SW
DIFFERENCE®

COMFORT AND DEXTERITY FOR EVERYDAY HAND PROTECTION.

REQUEST A SAMPLE
AND EXPERIENCE THE
DIFFERENCE.



TF-95BL

POWDER-FREE NITRILE EXAMINATION GLOVES
ECOTEK SUSTAINABLE TECHNOLOGY, ENERGEL,
AND pH NATURAL*


FOR PROFESSIONAL ENVIRONMENTS REQUIRING DURABILITY, COMFORT, AND RELIABLE PROTECTION

- EcoTek® Sustainable Technology*
- Proprietary pH Natural® coating supports the skin's natural pH to help discourage microbial growth that can lead to infection
- EnerGel® Hand Conditioning Technology clinically proven to hydrate and soothe skin
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards
- Comfortable Ergonomic Fit
- SHA Dermatologically Approved

Finger textured
surface for wet
and dry grip

Optimal thickness
for durability and
tactile sensitivity

Tear-resistant
beaded cuff for
easy donning

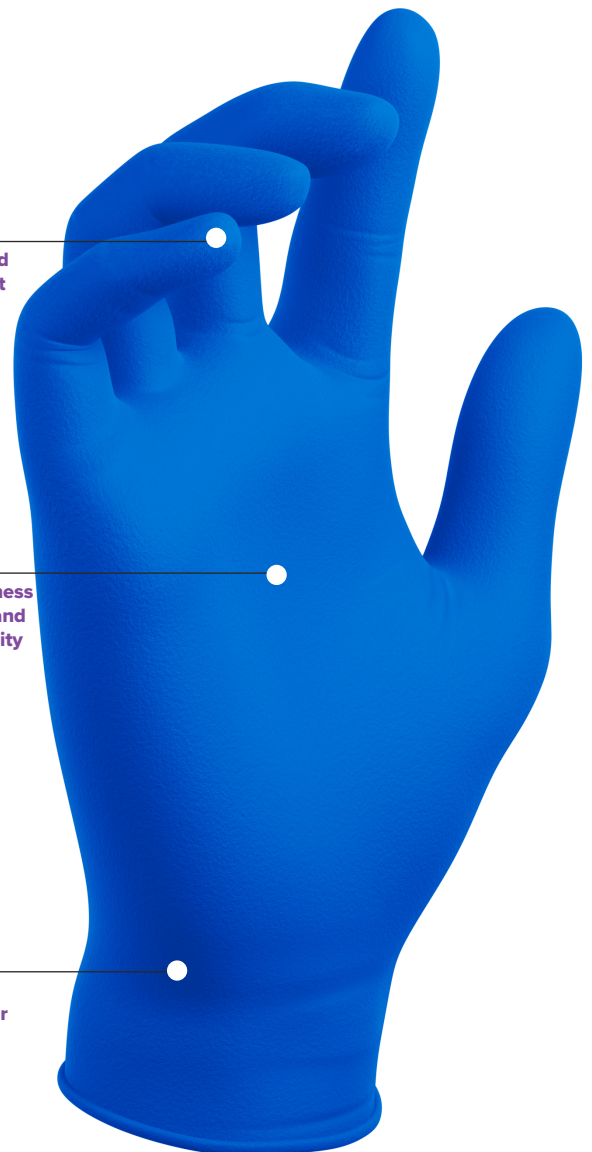

TF

TF-95BL

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 3.8g (large size)	 9.5"	 3.5 mil 2.4 mil	EcoTek® pH Natural® EnerGel®	 BLUE

ECOTEK



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2025 SW. All rights reserved.



TECHNICAL DATA



TF-95BL

POWDER-FREE NITRILE EXAMINATION GLOVES ECOTEK SUSTAINABLE TECHNOLOGY, ENERDEL, AND pH NATURAL*

POLYCARBIN

THIS GLOVE IS RECYCLABLE THROUGH POLYCARBIN'S LAB RECYCLING PROGRAM.

PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	TrueForm®
GRADE	Powder-Free Exam
MATERIAL	Nitrile
THICKNESS FINGER	3.5mil 0.08mm
PALM	2.4mil 0.06mm
COLOR	Blue
SURFACE	Finger Textured
LENGTH	9.5" 242mm
WEIGHT	3.5g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	Malaysia

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	14 MPA	14 MPA
ELONGATION:	500%	400%

INTEGRATED TECHNOLOGIES

ECOTEK Sustainable Technology: Product has been tested per ASTM D5526*

pH NATURAL Hand Health Technology: Controls pH levels of the skin to discourage microbial growth that can lead to infection

ENERDEL Hand Conditioning Technology: allows for thorough penetration of Aloe Vera into the skin, reduces water loss to retain moisture and has been clinically proven to prevent many skin ailments, like dermatitis.



* Specifications based on size Medium glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
Reach EU 1907/2006
EU 2016/425
ASTM D6319
ASTM D6978-05 (2019)
ASTM F1671-13

ASTM F739-12
FDA 21 CFR 177.2600



Please visit swssglobal.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N091341	XS 5½ – 6	3.0" 75mm	250 gloves per box 10 boxes per case
N091342	S 6½ – 7	3.3" 85mm	250 gloves per box 10 boxes per case
N091343	M 7½ – 8	3.7" 95mm	250 gloves per box 10 boxes per case
N091344	L 8½ – 9	4.1" 105mm	250 gloves per box 10 boxes per case
N091345	XL 9½ – 10	4.5" 115mm	250 gloves per box 10 boxes per case
N091346	2XL 10½ – 11	4.9" 125mm	225 gloves per box 10 boxes per case

TECHNOLOGY PATENTS

US 12,201,172B2, US 9,993,416 B1

Multiple U.S. and other patents pending.

APPLICATIONS

For Medical Use
Chemical Handling
Dental

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N09134X1125



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2025 SW. All rights reserved.



*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.