



FEEL THE SW  
DIFFERENCE™

# FULL LINE CATALOG



CELEBRATING  
**41**  
YEARS

**SW® IS ON A MISSION TO LEAD THE PERSONAL HAND  
PROTECTION INDUSTRY WITH SUSTAINABLE SOLUTIONS  
AND INNOVATION.**

## OUR BUSINESS



PRIVILEGED  
HELD



WOMAN  
OWNED



MINORITY  
LED

## OUR TEAM



GLOBAL  
TEAM

**100+**  
YEARS

INDUSTRY  
EXPERIENCE



CALIFORNIA  
BASED

## MANUFACTURING



SELECT THIRD-PARTY  
FACTORIES IN ASIA




MANUFACTURING  
& DISTRIBUTION



BEST IN CLASS  
SERVICE & SUPPORT



DEDICATED  
R&D TEAMS

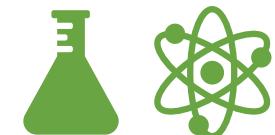

INDUSTRY LEADING  
HAND HEALTH TECHNOLOGIES

## OUR PRODUCT PORTFOLIO

SW Sustainability Solutions is a global leader in sustainable hand protection, combining cutting-edge glove technologies with a commitment to sustainability. SW is the only B Corp certified glove manufacturer that has targets for reducing Scope 1, 2, and 3 emissions. Our focus on R&D, skin health science, and manufacturing innovation drives the development of products that elevate worker performance across a wide range of industries—from healthcare and life sciences to automotive and manufacturing. With the largest portfolio of sustainable gloves and a bold vision for the future, SW brings a smarter, safer, and more responsible approach to hand protection. It's a difference you can feel—and a future you can trust.

SINGLE  
USE

 **TrueForm®**

MECHANICAL  
PROTECTION

 **GraphEx®**

CHEMICAL  
PROTECTION

 **NEWTRILE®**

 **PowerChem®**

 **KARBONHEX**

 **CORESAFE®**

 **PowerForm®**

 **TotalForm®**

 **MegaMan®**

**Bantam™**



**SKIN HEALTH ALLIANCE  
APPROVED**

**SW® products are the first single  
use gloves to be SHA approved:**

- skin safe products
- global standard adherence
- low environmental impact
- independent assessments
- support skin charities



## CONTENTS

|   |           |
|---|-----------|
| <b>SW® HAND HEALTH TECHNOLOGIES</b>     | <b>8</b>  |
| EnerGel®                                | 8         |
| pH Natural®                             | 9         |
| DriTek®                                 | 9         |
| Dry Core®                               | 9         |
| <b>SW® PERFORMANCE TECHNOLOGIES</b>     | <b>10</b> |
| EcoTek®                                 | 10        |
| TracTek®                                | 10        |
| BioFlex360™                             | 10        |
| Breach Alert®                           | 11        |
| AxiFybr®                                | 11        |
| <b>SINGLE-USE STYLES</b>                | <b>14</b> |
| TrueForm®                               | 16        |
| PowerForm®                              | 26        |
| PowerChem®                              | 40        |
| MegaMan®                                | 46        |
| Bantam™                                 | 50        |
| <b>MECHANICAL PROTECTION</b>            | <b>54</b> |
| GraphEx®                                | 56        |
| KarbonHex®                              | 60        |
| TotalForm®                              | 68        |
| <b>CHEMICAL PROTECTION</b>              | <b>74</b> |
| NewTrile®                               | 76        |
| CoreSafe®                               | 80        |
| <b>UNDERSTANDING CUT STANDARDS</b>      | <b>86</b> |
| <b>UNDERSTANDING CHEMICAL STANDARDS</b> | <b>87</b> |
| <b>GLOVE SIZE SELECTION</b>             | <b>88</b> |
| <b>SPECIFICATION GUIDE</b>              | <b>89</b> |



# EcoTek<sup>®</sup>

## SUSTAINABLE TECHNOLOGY

### Introducing SW<sup>®</sup> EcoTek Sustainable Technology

EcoTek is SW's patented, environmentally sustainable glove formula. EcoTek is manufactured sustainably and rigorously tested by an independent laboratory\*.

EcoTek is useful for all glove users and industries as it is reduces emissions when incinerated.

EcoTek is available in four single-use styles.



And introducing NewTrile<sup>®</sup> with EcoTek<sup>®</sup>  
Chemical-Resistant gloves  
now with sustainable technology.

**NEWTRILE<sup>®</sup>**  
featuring  
**EcoTek<sup>®</sup>**



\*EcoTek gloves are tested in an independent laboratory for their Anaerobic Biodegradation potential Under Accelerated Landfill Conditions. Results show 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the testing, contact [cs@swssglobal.com](mailto:cs@swssglobal.com).

# EnerGel®

Hydrates and rejuvenates hands for all-day comfort.  
New patented additive clinically proven to improve hand health.

Available in these popular styles:



# pH Natural®

Actively maintains skin pH at natural levels to reduce skin issues.  
Proprietary coating helps keep pH levels at 5.5, reducing microbial growth.

Available in these popular styles:



# DryCore®

Naturally pulls sweat away from the skin for healthier hands.  
Moisture-wicking system makes for a dry, comfortable environment.

Available in these popular styles:



# DriTek®

Moisture-wicking flock-lined system for drier, cooler, more comfortable hands.  
Naturally manages sweat for healthier hands and easy donning and doffing.

Available in these popular styles:



## EcoTek®

Environmentally sustainable glove formula. EcoTek is manufactured sustainably and rigorously tested per the ASTM D5526 standard\*.

Available in these popular styles:

### PowerForm®

PF-95BK PF-95GW PF-95BL  
PF-95TL PF-95GY PF-12WG  
PF-12TL PF-95OR PF-95HO  
PF-95LG PF-12OR PF-12BL

### TrueForm®

TF-95RB TF-12LG TF-95LG  
TF-95NV TF-95BL TF-95BK

### MegaMan®

MM-11BK

### PowerChem®

PC-12WT

P-024-098-ECO-WT

\*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swsglobal.com.

## TracTek®

Proprietary matrixed pattern that provides dramatic control. Designed for maximum surface-to-surface contact, providing enhanced grip in all conditions.

Available in these popular styles:

### PowerForm®

PF-95OR

**NEW**

## BioFlex360™

A next-generation foam nitrile coating engineered for advanced durability, grip, and precision. BioFlex360 delivers all-around performance with lightweight comfort, high dexterity, and breathable flexibility—built to support demanding tasks without compromise.

## Breach Alert®

Dual color, 2-ply construction technology provides immediate visual breach detection. Two distinct polymer layers add durability and dramatically improve safety.

Available in these popular styles:

### PowerForm®

PF-95GW  
PF-12WG

## AxiFybr®

Proprietary molecularly engineered yarn that dramatically enhances cut resistance. Provides the highest level cut protection with high glove comfort and dexterity.

Available in these popular styles:

### GraphEx®

G45100 G46200  
G66200

### TotalForm®

TF-44BK

Available in these popular styles:

### TotalForm®

TF-14BK TF-44BK

# Viral Protection

SW gloves have been successfully tested against the stringent US and EU viral penetration test standards, thus giving stakeholders a high level of protection from viruses, bacteria and fungi. This reduces or eliminates the risk of exposure to biological hazards and guarantees quality of every glove produced.

- ASTM F1671 is the standard used in North America. It is a pass or fail test designed to show whether the material can protect a wearer from viruses transmitted via blood or bodily fluids.
- EN ISO 374-5 Virus standard, is the standard in Europe. It measures the ability of gloves to protect from bacteria, fungi and virus penetration using ISO 16604 as the test method.



# Low Dermatitis Potential


SW® nitrile gloves have been clinically tested and proven to have reduced potential to cause skin irritation. This protection creates a cleaner glove with reduced chemical residues, removes the user's risk of allergic reactions, and will not induce contact dermatitis or Type IV hypersensitivity reaction.

- To achieve a 510K Certification, a medical grade glove must meet ASTM and FDA standards.
- Tested by an FDA registered and certified US laboratory and headed by a board-certified dermatologist. Testing was conducted on a minimum of 200 human subjects, to qualify for the Low Dermatitis Claim.



# SINGLE-USE STYLES

For decades, SW has been the premier manufacturer of single-use performance products. With a relentless focus on new manufacturing technologies and materials that drive innovation, SW single-use styles continuously push the boundaries of quality and worker-enhancing performance that fuels business success.

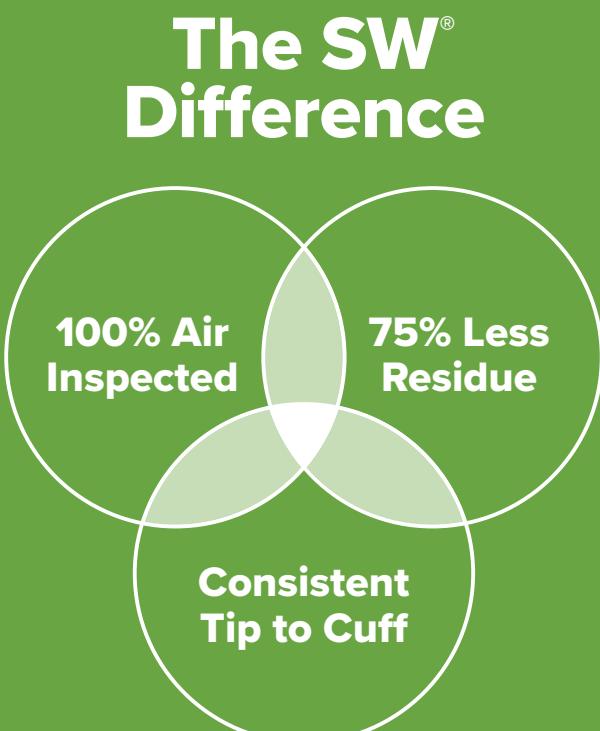

Better products start with better manufacturing.

# 8 Values of Quality

The 8 Values of Quality is the standard that we at SW hold for ourselves. It represents, to the core, how we manufacture our products, interact with stakeholders, and operate as a company.

You can learn more about SW's compliance and ethics on our website at [swsafety.com](http://swsafety.com).

### EIGHT VALUES OF QUALITY



**FEATURES**  
**RELIABILITY**  
**DURABILITY**  
**AESTHETICS**

**PERCEPTION**  
**PERFORMANCE**  
**CONFORMANCE**  
**SERVICEABILITY**



# QUALITY. COMFORT. DEXTERITY.

TrueForm® is made for those who rely on daily hand protection to provide ease of use and high dexterity. With TrueForm, quality is designed into every style using exacting manufacturing processes for tip-to-cuff consistency, glove after glove.




## FIRST HAND

This new nitrile exam glove is destined to be the workhorse of any professional practice or facility. When your day-to-day depends on consistent quality protection, this is the glove to reach for to always deliver on expectations, every time.



TF-95RB

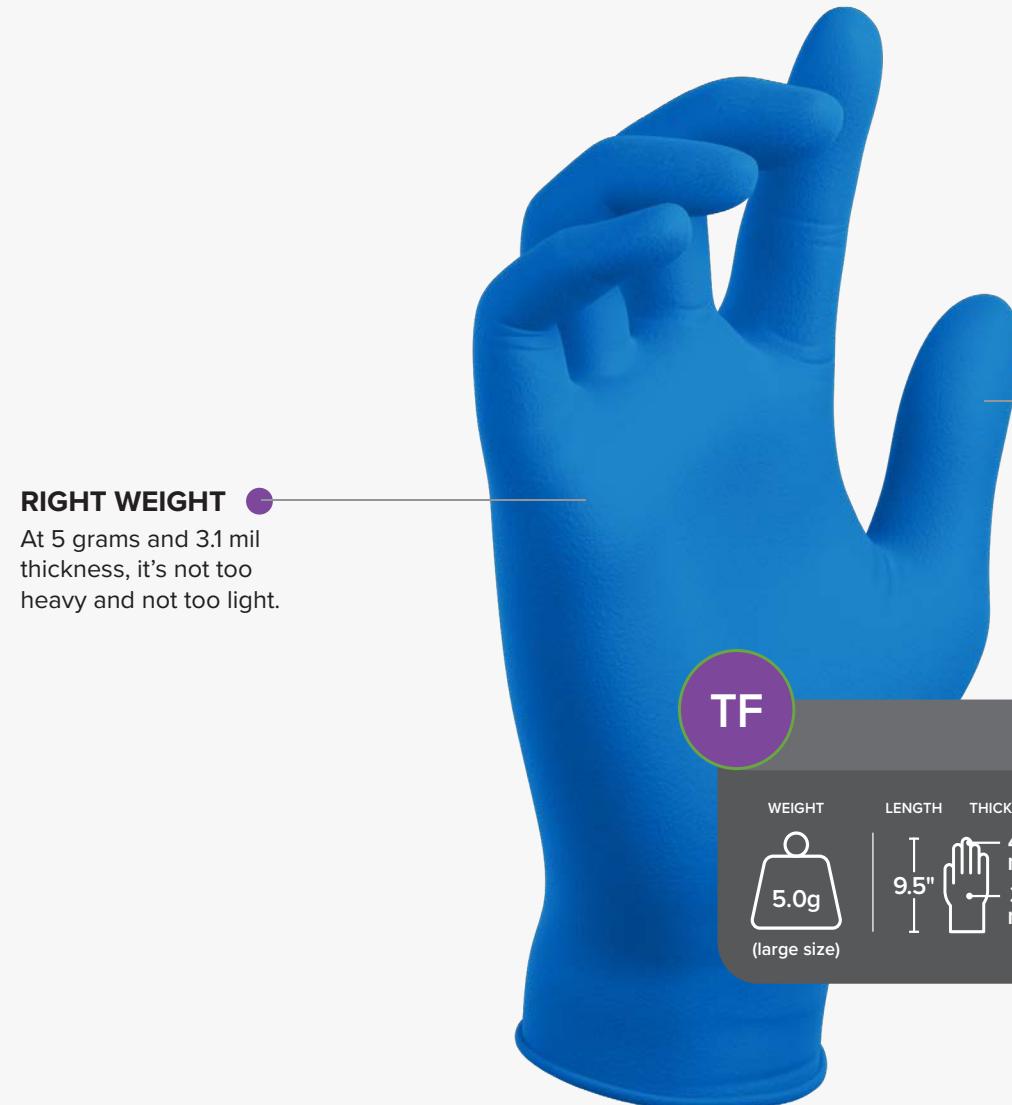

### RIGHT WEIGHT

At 5 grams and 3.1 mil thickness, it's not too heavy and not too light.

### SAME SAME

Manufactured to be consistent and flat packed so each one dispenses with the same quality feel.

## EXTENDED PROTECTION

These gloves provide tactile sensitivity and great grip with an extended cuff for added protection, so you can work in comfort and confidence.



TF-12LG



## Models & Ordering Information

### TF-065-095NT

#### POWDER-FREE LATEX EXAMINATION GLOVES

- Natural latex provides advanced chemical protection
- Tear-resistant beaded cuff for easy donning
- Optimal thickness for durability and tactile sensitivity
- Exceeds 1.5 AQL laboratory standards



#### ORDERING INFORMATION

|         |           |
|---------|-----------|
| L006201 | XS: 5.5-6 |
| L006202 | S: 6.5-7  |
| L006203 | M: 7.5-8  |
| L006204 | L: 8.5-9  |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242mm    |
| Finger Thickness              | 5.5mil / 0.14mm |
| Palm Thickness                | 4.7mil / 0.12mm |
| Tensile Strength Before Aging | 19 MPa          |
| Tensile Strength After Aging  | 16 MPa          |
| Elongation Before Aging       | 850%            |
| Elongation After Aging        | 750%            |
| AQL                           | 1.5             |

CE 0493 ISO 374-1:2016/TYPE B EN ISO 374-5:2016  
   

#### STANDARDS AND COMPLIANCE

|                     |
|---------------------|
| EN 420-2003         |
| EN 455:2000-2015    |
| ASTM D3578          |
| ASTM F1671-97       |
| FDA 21 CFR 177.2600 |

### TF-95RB

#### EVERYDAY NITRILE EXAM GLOVES WITH ECOTEK®

- The new lighter standard for everyday exam use
- Consistent quality glove to glove
- Beaded cuff allows easy donning and doffing



#### ORDERING INFORMATION

|         |            |
|---------|------------|
| N301341 | XS: 5.5-6  |
| N301342 | S: 6.5-7   |
| N301343 | M: 7.5-8   |
| N301344 | L: 8.5-9   |
| N301345 | XL: 9.5-10 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242mm    |
| Finger Thickness              | 4.7mil / 0.12mm |
| Palm Thickness                | 3.1mil / 0.08mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |

CE 0493 ISO 374-1:2016/TYPE B EN ISO 374-5:2016  
   

#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| ANSI/SEA 105-2016      |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

### TF-12LG

#### EXTENDED CUFF NITRILE EXAM GLOVES WITH ECOTEK®

- Extra length cuff provides additional protection
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



#### ORDERING INFORMATION

|         |               |
|---------|---------------|
| N027401 | XS: 5.5-6     |
| N027402 | S: 6.5-7      |
| N027403 | M: 7.5-8      |
| N027404 | L: 8.5-9      |
| N027405 | XL: 9.5-10    |
| N027406 | *2XL: 10.5-11 |

100 Gloves/Box 1000/Case  
\*90/Box, 900/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 12.0" / 305 mm  |
| Finger Thickness              | 5.9mil / 0.15mm |
| Palm Thickness                | 4.9mil / 0.12mm |
| Tensile Strength Before Aging | 21 MPa          |
| Tensile Strength After Aging  | 19 MPa          |
| Elongation Before Aging       | 580%            |
| Elongation After Aging        | 550%            |
| AQL                           | 1.5             |

CE 0493 ISO 374-1:2016/TYPE B EN ISO 374-5:2016  
   

#### STANDARDS AND COMPLIANCE


|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

## Models & Ordering Information

### TF-95LG

NITRILE EXAM GLOVES WITH ECOTEK®, pH NATURAL®, & ENERGEL®

- EcoTek® Sustainable Technology
- Proprietary pH Natural® coating supports the skin's natural pH to help discourage microbial growth that can lead to infection
- EnerGel® Hand Conditioning Technology clinically proven to hydrate and soothe skin
- Flat Stack Dispensing

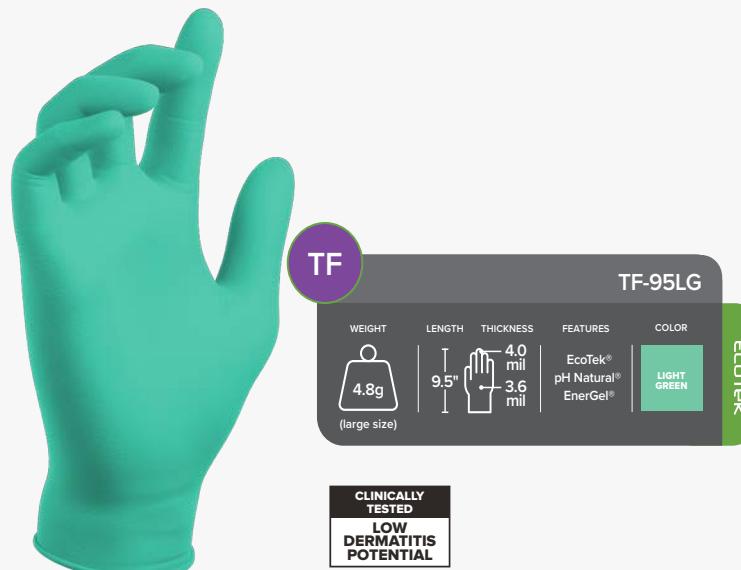

### TF-95NV

EVERYDAY NITRILE EXAM GLOVES WITH ECOTEK®

- EcoTek® Sustainable Technology
- Finger textured surface for wet and dry grip
- The right weight for resiliency and dexterity
- Tear-resistant beaded cuff for easy donning
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects



### TF-95BK

NITRILE EXAM GLOVES WITH ECOTEK®

- EcoTek® Sustainable Technology
- Finger textured surface for wet and dry grip
- The right weight for resiliency and dexterity
- Tear-resistant beaded cuff for easy donning
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects
- Comfortable Ergonomic Fit



#### ORDERING INFORMATION

|         |            |
|---------|------------|
| N028401 | XS: 5.5-6  |
| N028402 | S: 6.5-7   |
| N028403 | M: 7.5-8   |
| N028404 | L: 8.5-9   |
| N028405 | XL: 9.5-10 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | EnerGel®        |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" 242mm      |
| Finger Thickness              | 4.0mil 0.10mm   |
| Palm Thickness                | 3.6mil 0.09mm   |
| Tensile Strength Before Aging | 22 MPa          |
| Tensile Strength After Aging  | 20 MPa          |
| Elongation Before Aging       | 560%            |
| Elongation After Aging        | 550%            |
| AQL                           | 1.5             |



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N191341 | XS: 5.5-6    |
| N191342 | S: 6.5-7     |
| N191343 | M: 7.5-8     |
| N191344 | L: 8.5-9     |
| N191345 | XL: 9.5-10   |
| N191346 | 2XL: 10.5-11 |

200 Gloves/Box 2000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242mm    |
| Finger Thickness              | 3.5mil / 0.08mm |
| Palm Thickness                | 2.4mil / 0.06mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N191881 | XS: 5.5-6    |
| N191882 | S: 6.5-7     |
| N191883 | M: 7.5-8     |
| N191884 | L: 8.5-9     |
| N191885 | XL: 9.5-10   |
| N191886 | 2XL: 10.5-11 |

200 Gloves/Box 2000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 3.5mil / 0.08mm |
| Palm Thickness                | 2.4mil / 0.06mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN ISO 21420:2020  |
| EN 455:2000-2015   |
| ASTM D6319         |
| Reach EU 1907/2006 |
| EU 2016/425        |

#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN ISO 21420:2020  |
| EN 455:2000-2015   |
| ASTM D6319         |
| Reach EU 1907/2006 |
| EU 2016/425        |

## Models & Ordering Information

### TF-95BL

NITRILE EXAM GLOVES WITH ECOTEK®, pH NATURAL®, & ENERGEL®

- EcoTek® Sustainable Technology
- Proprietary pH Natural® coating supports the skin's natural pH to help discourage microbial growth that can lead to infection
- EnerGel® Hand Conditioning Technology clinically proven to hydrate and soothe skin
- Silicone-free for critical environments
- Tear-resistant beaded cuff eases donning



#### ORDERING INFORMATION

|          |              |
|----------|--------------|
| N091341  | XS: 5.5-6    |
| N091342  | S: 6.5-7     |
| N091343  | M: 7.5-8     |
| N091344  | L: 8.5-9     |
| N091345  | XL: 9.5-10   |
| N091346* | 2XL: 10.5-11 |

250 Gloves/Box 2500/Case

\*225/Box, 2250/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | EnerGel®        |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" 242mm      |
| Finger Thickness              | 3.5mil 0.08mm   |
| Palm Thickness                | 2.4mil 0.06mm   |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN ISO 21420:2020  |
| EN 455:2000-2015   |
| ASTM D6319         |
| Reach EU 1907/2006 |
| EU 2016/425        |



# DESIGNED. ENGINEERED. PERFORMANCE.

PowerForm® brings new hand protection technologies to workplace performance. From sweat management to enhanced grip design, PowerForm features enable workers to execute tasks with more confidence. PowerForm focuses on functional advancements to optimize on-the-job performance every day.



## A TRIPLE FEATURE

Made for those high-risk environments where, if there is a glove breach, you need to know now.

The white interior of this dual layer glove provides an immediate sign of any puncture or compromise. In addition, EnerGel rejuvenates hands for long-term wear and EcoTek.



### PF-95GW

EnerGel®

EcoTek®

Breach Alert®



## SWEAT PROBLEMS SOLVED

Work in comfort with DriTek, built-in moisture absorbing technology that keeps hands dryer and cooler.



### PF-95GY

DriTek®

EcoTek®



## Models & Ordering Information

### PF-95HO

NITRILE EXAM GLOVES WITH ECOTEK®

- EcoTek® Sustainable Technology
- Hi-Vis orange color
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects
- Comfortable Ergonomic Fit
- Beaded cuff allows easy donning and doffing



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N200752 | S: 6.5-7     |
| N200753 | M: 7.5-8     |
| N200754 | L: 8.5-9     |
| N200755 | XL: 9.5-10   |
| N200756 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.5mil / 0.15mm |
| Palm Thickness                | 5.0mil / 0.13mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN ISO 21420:2020  |
| EN 455-2000-2015   |
| ASTM D6319         |
| Reach EU 1907/2006 |
| EU 2016/425        |

### PF-95LG

NITRILE EXAM GLOVES WITH ECOTEK®

- EcoTek® Sustainable Technology\*
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects
- Comfortable Ergonomic Fit



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N200412 | S: 6.5-7     |
| N200413 | M: 7.5-8     |
| N200414 | L: 8.5-9     |
| N200415 | XL: 9.5-10   |
| N200416 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.5mil / 0.15mm |
| Palm Thickness                | 5.0mil / 0.13mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN ISO 21420:2020  |
| EN 455-2000-2015   |
| ASTM D6319         |
| Reach EU 1907/2006 |
| EU 2016/425        |

### PF-95BK

NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek sustainable technology



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N716882 | S: 6.5-7     |
| N716883 | M: 7.5-8     |
| N716884 | L: 8.5-9     |
| N716885 | XL: 9.5-10   |
| N716886 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.5mil / 0.14mm |
| Palm Thickness                | 5.0mil / 0.12mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                   |
|-------------------|
| EN ISO 21420:2020 |
| EN 455-2000-2015  |
| ASTM D6319-19     |
| ASTM F1671-13     |
| ASTM F739-12      |

Reach EU 1907/2006

EU 2016/425

CAT III Complex Design

FDA 21 CFR 177.2600

## Models & Ordering Information

### PF-95TL

#### NITRILE EXAM GLOVES WITH ECOTEK®

- Finger textured surface for wet and dry grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® Sustainable Technology



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N200361 | XS: 5.5-6    |
| N200362 | S: 6.5-7     |
| N200363 | M: 7.5-8     |
| N200364 | L: 8.5-9     |
| N200365 | XL: 9.5-10   |
| N200366 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.5mil / 0.14mm |
| Palm Thickness                | 5.0mil / 0.12mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |

### PF-95GW

#### DUAL LAYER NITRILE EXAM GLOVES WITH ENERGEL®, BREACH ALERT® AND ECOTEK®

- EnerGel hand rejuvenating technology for comfort and hand health
- Breach Alert dual-layer provides extra durability and safety
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® Sustainable Technology



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N189471 | XS: 5.5-6    |
| N189472 | S: 6.5-7     |
| N189473 | M: 7.5-8     |
| N189474 | L: 8.5-9     |
| N189475 | XL: 9.5-10   |
| N189476 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                        |
|-------------------------------|------------------------|
| Inner Surface                 | EnerGel / Breach Alert |
| Outer Surface                 | Fully Textured         |
| Cuff Finish                   | Beaded                 |
| Fit Type                      | Ambidextrous           |
| Length                        | 9.5" / 242 mm          |
| Finger Thickness              | 5.5mil / 0.14mm        |
| Palm Thickness                | 5.0mil / 0.12mm        |
| Tensile Strength Before Aging | 14 MPa                 |
| Tensile Strength After Aging  | 14 MPa                 |
| Elongation Before Aging       | 500%                   |
| Elongation After Aging        | 400%                   |
| AQL                           | 1.5                    |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

### PF-95IN

#### NITRILE EXAM GLOVES

- Silicone-free for critical environments
- Optimal thickness for durability and tactile sensitivity
- Finger textured surface for wet and dry grip
- Tear-resistant beaded cuff for easy donning



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N700342 | S: 6.5-7     |
| N700343 | M: 7.5-8     |
| N700344 | L: 8.5-9     |
| N700345 | XL: 9.5-10   |
| N700346 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.9mil / 0.15mm |
| Palm Thickness                | 5.0mil / 0.12mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN 420-2003            |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |



## Models & Ordering Information

### PF-95OR

NITRILE EXAM GLOVES WITH TRACTEK® AND ECOTEK®

- TracTek® high density pattern for grip in wet / oily conditions
- EcoTek® Sustainable Technology
- Hi-Vis orange color
- Beaded cuff allows easy donning and doffing



### PF-95BL

NITRILE EXAM GLOVES WITH DRY CORE® AND ECOTEK®

- Dry Core absorbent technology keeps hands dry and cool
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- ANSI Level 3 abrasion resistance



### PF-95GY

NITRILE EXAM GLOVES WITH DRITEK® AND ECOTEK®

- DriTek absorbent lining keeps hands dry and cool
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® Sustainable Technology



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N991752 | S: 6.5-7     |
| N991753 | M: 7.5-8     |
| N991754 | L: 8.5-9     |
| N991755 | XL: 9.5-10   |
| N991756 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | TracTek         |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 5.9mil / 0.15mm |
| Palm Thickness                | 5.1mil / 0.13mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N106551 | XS: 5.5-6    |
| N106552 | S: 6.5-7     |
| N106553 | M: 7.5-8     |
| N106554 | L: 8.5-9     |
| N106555 | XL: 9.5-10   |
| N106556 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Dry Core        |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 6.9mil / 0.18mm |
| Palm Thickness                | 6.1mil / 0.16mm |
| Tensile Strength Before Aging | 20 MPa          |
| Tensile Strength After Aging  | 19 MPa          |
| Elongation Before Aging       | 560%            |
| Elongation After Aging        | 550%            |
| AQL                           | 1.5             |



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N260501 | XS: 5.5-6    |
| N260502 | S: 6.5-7     |
| N260503 | M: 7.5-8     |
| N260504 | L: 8.5-9     |
| N260505 | XL: 9.5-10   |
| N260506 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | DriTek          |
| Outer Surface                 | Fully Textured  |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 8.2mil / 0.21mm |
| Palm Thickness                | 6.2mil / 0.16mm |
| Tensile Strength Before Aging | 15 MPa          |
| Tensile Strength After Aging  | 16 MPa          |
| Elongation Before Aging       | 550%            |
| Elongation After Aging        | 500%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                    |
|--------------------|
| EN 420:2003        |
| EN 455:2000-2015   |
| EU 2016/425        |
| Reach EU 1907/2006 |
| ANSI/ISEA 105-2016 |
| US/EU Food Contact |

#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| ANSI/ISEA 105-2016     |
| FDA 21 CFR 177.2600    |

#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| ANSI/ISEA 105-2016     |
| FDA 21 CFR 177.2600    |

## Models & Ordering Information

### PF-12TL

#### EXTENDED CUFF HEAVY DUTY NITRILE EXAM GLOVES WITH ECOTEK®

- Extended cuff provides added worker protection
- Tested for use with harmful chemotherapy drugs
- Finger textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N127361 | XS: 5.5-6    |
| N127362 | S: 6.5-7     |
| N127363 | M: 7.5-8     |
| N127364 | L: 8.5-9     |
| N127365 | XL: 9.5-10   |
| N127366 | 2XL: 10.5-11 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Finger Textured |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 12.0" / 305 mm  |
| Finger Thickness              | 7.0mil / 0.17mm |
| Palm Thickness                | 6.2mil / 0.15mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |




#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

### PF-12WG

#### EXTENDED CUFF NITRILE EXAM GLOVES WITH ENERGEL®, BREACH ALERT®, pH NATURAL®, AND ECOTEK®

- Finger textured surface for wet and dry grip
- Extended-cuff for added coverage and protection
- Tear-resistant beaded cuff for easy donning

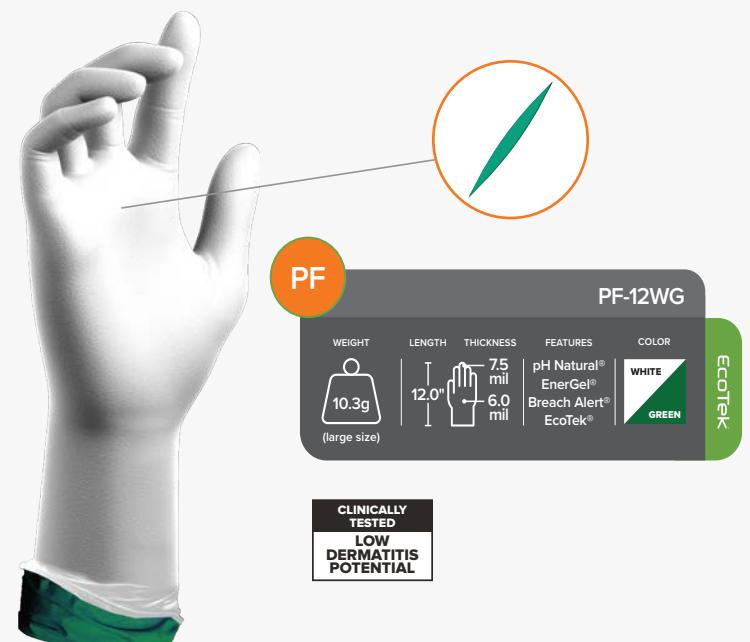

#### ORDERING INFORMATION

|         |               |
|---------|---------------|
| N188172 | XS: 5.5-6     |
| N188173 | S: 6.5-7      |
| N188174 | M: 7.5-8      |
| N188175 | L: 8.5-9      |
| N188176 | *XL: 9.5-10   |
| N188177 | *2XL: 10.5-11 |

100 Gloves/Box 1000/Case  
\*90/Box, 900/Case

#### PHYSICAL PROPERTIES

|                               |                        |
|-------------------------------|------------------------|
| Inner Surface                 | Breach Alert / EnerGel |
| Outer Surface                 | Finger Textured        |
| Cuff Finish                   | Beaded                 |
| Fit Type                      | Ambidextrous           |
| Length                        | 12.0" / 305 mm         |
| Finger Thickness              | 7.5mil / 0.19mm        |
| Palm Thickness                | 6.0mil / 0.15mm        |
| Tensile Strength Before Aging | 14 MPa                 |
| Tensile Strength After Aging  | 14 MPa                 |
| Elongation Before Aging       | 500%                   |
| Elongation After Aging        | 400%                   |
| AQL                           | 1.5                    |



#### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

### PF-12OR

#### EXTENDED CUFF NITRILE EXAM GLOVES WITH ECOTEK®

- Extended-cuff for added coverage and protection
- EcoTek® Sustainable Technology
- Clean Washed & 100% air-inspected for consistent, residue-free quality
- Silicone-free & FDA-compliant for safe contact with wet and oily foods
- Fish-scale texture delivers strong grip in dry, wet, and oily conditions
- Enhanced puncture and abrasion resistance for tougher protection



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N909753 | M: 7.5-8     |
| N909754 | L: 8.5-9     |
| N909755 | XL: 9.5-10   |
| N909756 | 2XL: 10.5-11 |
| N909757 | 3XL: 11.5-12 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                  |
|-------------------------------|------------------|
| Inner Surface                 | Smooth           |
| Outer Surface                 | Fully Textured   |
| Cuff Finish                   | Beaded           |
| Fit Type                      | Ambidextrous     |
| Length                        | 12.0" / 290 mm   |
| Finger Thickness              | 11.2mil / 0.28mm |
| Palm Thickness                | 8.0mil / 0.20mm  |
| Tensile Strength Before Aging | 14 MPa           |
| Tensile Strength After Aging  | 14 MPa           |
| Elongation Before Aging       | 500%             |
| Elongation After Aging        | 400%             |
| AQL                           | 1.5              |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN ISO 21420:2020    |
| EN 455:2000-2015     |
| ASTM D6978-05 (2019) |
| Reach EU 1907/2006   |
| EU 2016/425          |




## Models & Ordering Information

### PF-12BL

EXTENDED CUFF NITRILE EXAM GLOVES WITH  
ECOTEK®

- Extended-cuff for added coverage and protection
- EcoTek® Sustainable Technology
- Clean Washed & 100% air-inspected for consistent, residue-free quality
- Silicone-free & FDA-compliant for safe contact with wet and oily foods
- Fish-scale texture delivers strong grip in dry, wet, and oily conditions
- Enhanced puncture and abrasion resistance for tougher protection

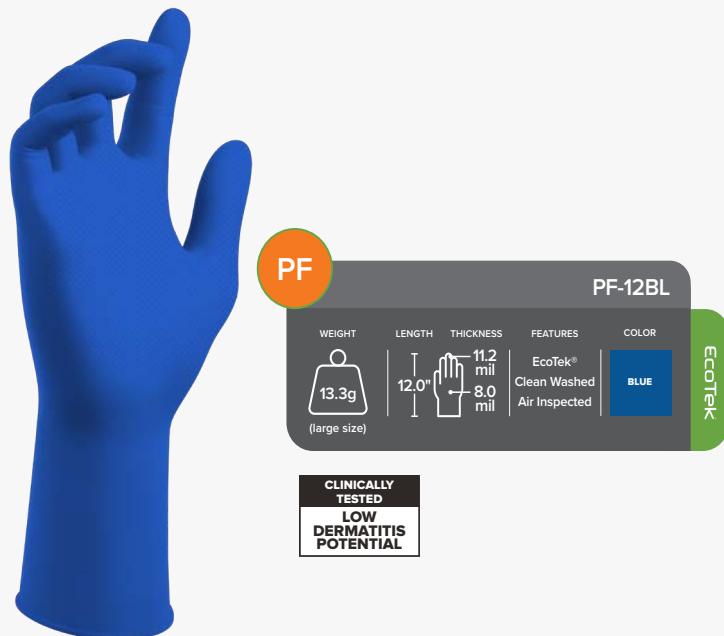

#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N909553 | M: 7.5-8     |
| N909554 | L: 8.5-9     |
| N909555 | XL: 9.5-10   |
| N909556 | 2XL: 10.5-11 |
| N909557 | 3XL: 11.5-12 |

50 Gloves/Box 500/Case

#### PHYSICAL PROPERTIES

|                               |                  |
|-------------------------------|------------------|
| Inner Surface                 | Smooth           |
| Outer Surface                 | Fully Textured   |
| Cuff Finish                   | Beaded           |
| Fit Type                      | Ambidextrous     |
| Length                        | 12.0" / 290 mm   |
| Finger Thickness              | 11.2mil / 0.28mm |
| Palm Thickness                | 8.0mil / 0.20mm  |
| Tensile Strength Before Aging | 14 MPa           |
| Tensile Strength After Aging  | 14 MPa           |
| Elongation Before Aging       | 500%             |
| Elongation After Aging        | 400%             |
| AQL                           | 1.5              |



#### STANDARDS AND COMPLIANCE

|                      |
|----------------------|
| EN ISO 21420:2020    |
| EN 455-2000-2015     |
| ASTM D6978-05 (2019) |
| Reach EU 1907/2006   |
| EU 2016/425          |
| FDA 21 CFR 177.2600  |



# INTRICATE. TECHNICAL. ADVANCED.

Born of SW® manufacturing capabilities and advancements in material science, PowerChem offers chemical protection for highly specific applications. SW will be introducing new PowerChem styles that address a range of complex and specialized technical needs.



## EXCEPTIONAL PERFORMANCE

Designed for cleanroom environments, these gloves offer precision, protection, and convenience. With a 6.2 mil finger thickness for enhanced dexterity, they incorporate EcoTek® sustainable technology for reduced environmental impact. Packaged in a storage-efficient bag, they utilize SafeDon® cuff-first dispensing to minimize cross-contamination—reducing bacteria and mold exposure by up to 95.9%—and improve storage efficiency. The packaging also cuts space needs by 40% and reduces cardboard waste, supporting sustainability and cost savings.



PC-12WT

EcoTek®

### ENHANCED GRIP & DEXTERITY

Finger textured surface for wet and dry grip

### CLEANROOM-RATED


Manufactured for Class 100 (ISO 5) cleanrooms with ultra-low particle levels to protect your controlled environment

### GOOD BYE

EcoTek Sustainable Technology

### Low Dermatitis Potential

Formulated to minimize the risk of Type I and Type IV allergic reactions, supporting user comfort in extended wear.

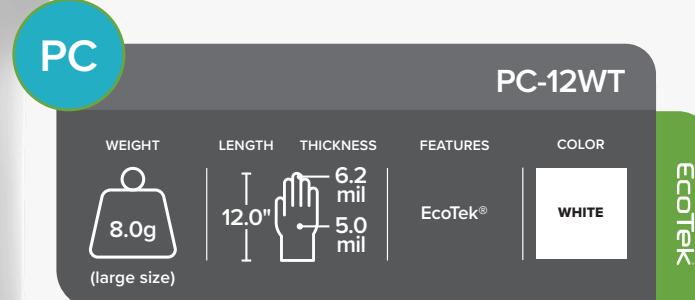

#### ORDERING INFORMATION

|         |            |
|---------|------------|
| N427102 | S: 6.5-7   |
| N427103 | M: 7.5-8   |
| N427104 | L: 8.5-9   |
| N427104 | XL: 9.5-10 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 12" / 290 mm    |
| Finger Thickness              | 6.2mil / 0.16mm |
| Palm Thickness                | 5.0mil / 0.12mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                     |
|---------------------|
| ISO 14644-9:2012    |
| IEST-RP-CC005.4     |
| ASTM D6319-19       |
| ASTM F1671-13       |
| ASTM D5151-19       |
| ASTM D6978-05(2019) |
| ASTM F1671-13       |
| EN ISO 21420:2020   |
| EN 374:2016+A1:2018 |
| EN 455-2000-2015    |
| EN ISO 23464:2020   |
| ASTM F739-12        |
| Reach EU 1907/2006  |
| EU 2016/425         |
| FDA 21 CFR 177.2600 |

## Models & Ordering Information

### PC-045-095-GR

#### NEOPRENE EXAM GLOVES

- Extended cuff provides added protection
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- Extra thickness for more durability



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| K000402 | S: 6.5-7     |
| K000403 | M: 7.5-8     |
| K000404 | L: 8.5-9     |
| K000405 | XL: 9.5-10   |
| K000406 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 3.5mil / 0.09mm |
| Palm Thickness                | 2.8mil / 0.07mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                     |
|---------------------|
| EN ISO 21420:2020   |
| EN 455:2000-2015    |
| ASTM D6977-19       |
| Reach EU 1907/2006  |
| EU 2016/425         |
| FDA 21 CFR 177.2600 |

### PC-95GR

#### NEOPRENE EXAM GLOVES

- Tested for use with chemotherapy drugs
- Textured surface delivers excellent grip
- Beaded cuff allows easy donning and doffing
- Neoprene material for softness, elasticity, and chemical resistance



#### ORDERING INFORMATION

|         |              |
|---------|--------------|
| K001401 | XS: 5.5-6    |
| K001402 | S: 6.5-7     |
| K001403 | M: 7.5-8     |
| K001404 | L: 8.5-9     |
| K001405 | XL: 9.5-10   |
| K001406 | 2XL: 10.5-11 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 9.5" / 242 mm   |
| Finger Thickness              | 6.2mil / 0.16mm |
| Palm Thickness                | 4.7mil / 0.12mm |
| Tensile Strength Before Aging | 18 MPa          |
| Tensile Strength After Aging  | 18 MPa          |
| Elongation Before Aging       | 750%            |
| Elongation After Aging        | 700%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE


|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6977-19          |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

### PC-12WT

#### ECOTEK SUSTAINABLE

#### NITRILE CLEANROOM GLOVES

- EcoTek® Sustainable Technology\*
- SafeDon® dispensing minimizes cross-contamination while delivering significant space and packaging savings.
- Low Dermatitis Potential minimizes the risk of Type I and Type IV allergies and enhances safety for users with sensitive skin
- Class 100 (ISO 5) cleanroom gloves
- Extended-cuff for additional protection

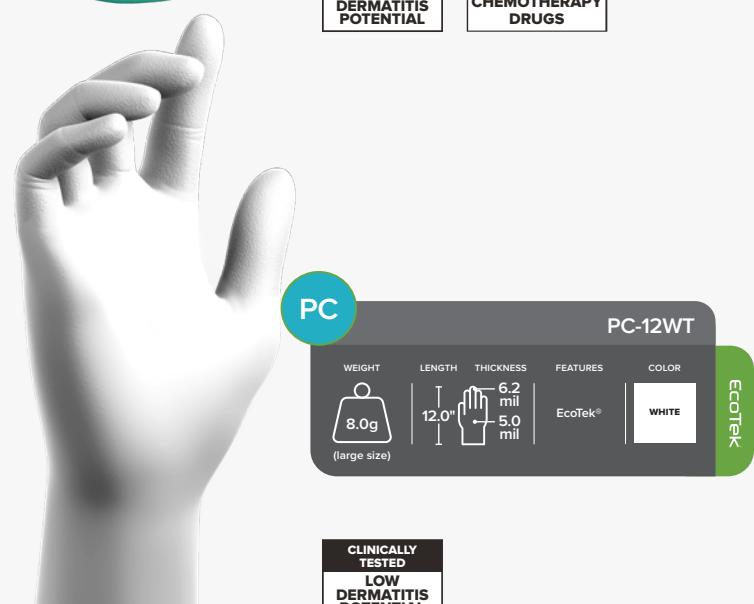

#### ORDERING INFORMATION

|         |            |
|---------|------------|
| N427102 | S: 6.5-7   |
| N427103 | M: 7.5-8   |
| N427104 | L: 8.5-9   |
| N427104 | XL: 9.5-10 |

100 Gloves/Box 1000/Case

#### PHYSICAL PROPERTIES

|                               |                 |
|-------------------------------|-----------------|
| Inner Surface                 | Smooth          |
| Outer Surface                 | Textured        |
| Cuff Finish                   | Beaded          |
| Fit Type                      | Ambidextrous    |
| Length                        | 12" / 290 mm    |
| Finger Thickness              | 6.2mil / 0.16mm |
| Palm Thickness                | 5.0mil / 0.12mm |
| Tensile Strength Before Aging | 14 MPa          |
| Tensile Strength After Aging  | 14 MPa          |
| Elongation Before Aging       | 500%            |
| Elongation After Aging        | 400%            |
| AQL                           | 1.5             |



#### STANDARDS AND COMPLIANCE

|                     |
|---------------------|
| ISO 14644-9:2012    |
| IEST-RP-CC005.4     |
| ASTM D6319-19       |
| ASTM F1671-13       |
| ASTM D5151-19       |
| ASTM D6978-05(2019) |
| ASTM F1671-13       |
| EN ISO 21420:2020   |
| EN 374:2016+A1:2018 |
| EN 455-2000-2015    |
| EN ISO 23464:2020   |
| ASTM F739-12        |
| Reach EU 1907/2006  |
| EU 2016/425         |
| FDA 21 CFR 177.2600 |



# TOUGHER. ROUGHER. READY.

MegaMan pushes the boundaries of single-use hand protection performance with new levels of abrasion resistance, sweat management, and comfort that deliver in exceedingly severe environments. When protection performance matters most, it's no wonder MegaMan gets the call for the toughest jobs.



## MEGA TOUGH

The glove that set the new standard for single-use protection. Featuring a consistent 8.5 mil thickness, ANSI Level 3 abrasion resistance, and DriTek® absorbent lining, it is ready to take the call for any job.



## MM-11BK

DriTek®

EcoTek®



## RELIABLY TOUGH

Consistent 8.5 mil thickness for tip to cuff consistency, and 100% air inspected.

## NO SWEAT, IT'S DRITEK®

Moisture absorbent lining keeps hands dry, cool and healthy.

## MULTILAYER CONSTRUCTION

ANSI and EN Level 3 abrasion resistance that lasts up to 3x longer.

## MM-11BK

DriTek®

EcoTek®



### ORDERING INFORMATION

|         |              |
|---------|--------------|
| N260881 | XS: 5.5-6    |
| N260882 | S: 6.5-7     |
| N260883 | M: 7.5-8     |
| N260884 | L: 8.5-9     |
| N260885 | XL: 9.5-10   |
| N260886 | 2XL: 10.5-11 |
| N260887 | 3XL: 11.5-12 |

### 50 Gloves/Box 500/Case

### VEND PACK

|         |              |
|---------|--------------|
| N164882 | S: 6.5-7     |
| N164883 | M: 7.5-8     |
| N164884 | L: 8.5-9     |
| N164885 | XL: 9.5-10   |
| N164886 | 2XL: 10.5-11 |
| N164887 | 3XL: 11.5-12 |

### 8 Gloves/Pack 800/Case

### PHYSICAL PROPERTIES

|                               |                  |
|-------------------------------|------------------|
| Inner Surface                 | DriTek           |
| Outer Surface                 | Fully Textured   |
| Cuff Finish                   | Beaded           |
| Fit Type                      | Ambidextrous     |
| Length                        | 11.0" / 280 mm   |
| Finger Thickness              | 10.1mil / 0.26mm |
| Palm Thickness                | 8.5mil / 0.22mm  |
| Tensile Strength Before Aging | 17 MPa           |
| Tensile Strength After Aging  | 16 MPa           |
| Elongation Before Aging       | 560%             |
| Elongation After Aging        | 520%             |
| AQL                           | 1.5              |



### STANDARDS AND COMPLIANCE

|                        |
|------------------------|
| EN ISO 21420:2020      |
| EN 455:2000-2015       |
| ASTM D6319-19          |
| ASTM D6978-05 (2019)   |
| ASTM F1671-13          |
| ASTM F739-12           |
| Reach EU 1907/2006     |
| EU 2016/425            |
| ANSI/ISEA 105-2016     |
| CAT III Complex Design |
| FDA 21 CFR 177.2600    |

# Bantam™

## LIGHTWEIGHT TPE PROTECTION

Bantam is the economical choice for comfort and convenient protection. Available in exam grade and industrial grade styles, TPE gloves provide chemical resistance similar to natural rubber latex while offering a high degree of sensitivity and dexterity. The clean material and manufacturing process result in low residue gloves that reduce the risk of harmful skin reactions – making them suitable for a wide range of workers.



## Models & Ordering Information

### P-021-098-WT

WHITE SINGLE-USE THERMOPLASTIC ELASTOMER (TPE) GLOVES

- Food safe
- High tensile strength and stretchability
- Industrial use 4.0 AQL
- Outperforms vinyl gloves



### P-024-098-ECO-WT

WHITE EXAM SUSTAINABLE GRADE THERMOPLASTIC ELASTOMER (TPE) GLOVES

- Food safe
- High tensile strength and stretchability
- Exceeds 1.5 AQL laboratory standards
- Outperforms vinyl gloves
- EcoTek sustainable technology



| ORDERING INFORMATION        |            |
|-----------------------------|------------|
| P790103                     | M: 7.5-8   |
| P790104                     | L: 8.5-9   |
| P790105                     | XL: 9.5-10 |
| 200 Gloves/Box 5 Boxes/Case |            |

| PHYSICAL PROPERTIES           |              |
|-------------------------------|--------------|
| Material                      | TPE          |
| Cuff Type                     | Straight     |
| Fit Type                      | Ambidextrous |
| Length                        | 9.8"         |
| Palm Thickness                | 2.1mil       |
| Cuff Thickness                | 2.1mil       |
| Finger Thickness              | 2.1mil       |
| Tensile Strength Before Aging | 11 MPa       |
| Tensile Strength After Aging  | 11 MPa       |
| Elongation Before Aging       | 300%         |
| Elongation After Aging        | 300%         |
| AQL                           | 4.0          |



| STANDARDS AND COMPLIANCE |
|--------------------------|
| EN ISO 21420:2020        |
| Reach EU 1907/2006       |
| EU 2016/425              |

| STANDARDS AND COMPLIANCE |
|--------------------------|
| EN ISO 21420:2020        |
| EN 455-2000-2015         |
| ASTM D5250-19            |
| Reach EU 1907/2006       |
| EU 2016/425              |

| ORDERING INFORMATION        |            |
|-----------------------------|------------|
| P700102                     | S: 6.5-7   |
| P700103                     | M: 7.5-8   |
| P700104                     | L: 8.5-9   |
| P700105                     | XL: 9.5-10 |
| 200 Gloves/Box 5 Boxes/Case |            |

| PHYSICAL PROPERTIES           |              |
|-------------------------------|--------------|
| Material                      | TPE          |
| Cuff Type                     | Straight     |
| Fit Type                      | Ambidextrous |
| Length                        | 9.8"         |
| Palm Thickness                | 3.2mil       |
| Cuff Thickness                | 3.2mil       |
| Finger Thickness              | 3.2mil       |
| Tensile Strength Before Aging | 11 MPa       |
| Tensile Strength After Aging  | 11 MPa       |
| Elongation Before Aging       | 300%         |
| Elongation After Aging        | 300%         |
| AQL                           | 1.5          |





## MECHANICAL PROTECTION

SW® has brought its innovation and hand health mindset to cut-resistant gloves. Our new products are developed in the service of protecting workers and giving them more comfort and confidence to make them more successful every day.

# THE INDUSTRIAL UPGRADE

## GRAPHEX®

*featuring*

AxiFybr

**GRAPHEX® with AxiFybr® Cut-Resistant Technology**  
48% stronger, 21% more cut-resistant, and 2X more  
abrasion-resistant than the competition.

**GRAPHEX® is a new line of hand protection  
featuring our AxiFybr® cut-resistant technology.**

Proprietary AxiFybr® yarn is engineered at the  
molecular level enabling GraphEx™ products  
to provide the highest level of cut protection  
without loss of comfort, fit or flexibility.

## GRAPHEX®

**G45100**

ANSI  
A4  
CUT  
ANSI  
5  
ABR

## GRAPHEX®

**G46200**

ANSI  
A4  
CUT  
ANSI  
6  
ABR

## GRAPHEX™

**G66200**


ANSI  
A6  
CUT  
ANSI  
6  
ABR

## Models & Ordering Information

### G45100

CUT RESISTANT LEVEL 4 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.

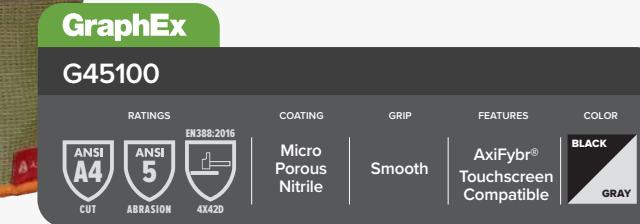

| ORDERING INFORMATION |         |
|----------------------|---------|
| G451002              | S: 7    |
| G451003              | M: 8    |
| G451004              | L: 9    |
| G451005              | XL: 10  |
| G451006              | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

| PHYSICAL PROPERTIES |                      |
|---------------------|----------------------|
| Coating Material    | Micro Porous Nitrile |
| Liner Material      | AxiFybr®             |
| Cuff Type           | Knit                 |
| Fit Type            | Hand-Specific        |
| Length              | 10.2"                |
| Abrasion Level      | ANSI 5               |
| Cut Level           | ANSI A4              |
| Gauge               | 18G                  |




| STANDARDS AND COMPLIANCE |  |
|--------------------------|--|
| EN 420-2003+A1: 2009     |  |
| EN 388:2016              |  |
| FDA 21 CFR 177.1520      |  |
| FDA 21 CFR 177.2600      |  |

### G46200

CUT RESISTANT LEVEL 4 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.

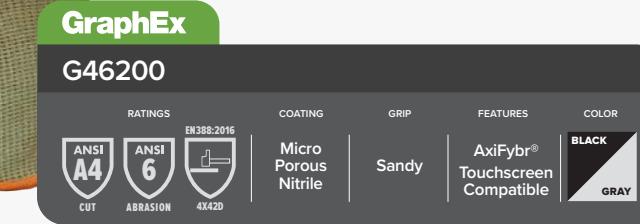

| ORDERING INFORMATION |         |
|----------------------|---------|
| G462002              | S: 7    |
| G462003              | M: 8    |
| G462004              | L: 9    |
| G462005              | XL: 10  |
| G462006              | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

| PHYSICAL PROPERTIES |                      |
|---------------------|----------------------|
| Coating Material    | Micro Porous Nitrile |
| Liner Material      | AxiFybr®             |
| Cuff Type           | Knit                 |
| Fit Type            | Hand-Specific        |
| Length              | 10.2"                |
| Abrasion Level      | ANSI 6               |
| Cut Level           | ANSI A4              |
| Gauge               | 18G                  |




| STANDARDS AND COMPLIANCE |  |
|--------------------------|--|
| EN 420-2003+A1: 2009     |  |
| EN 388:2016              |  |
| FDA 21 CFR 177.1520      |  |
| FDA 21 CFR 177.2600      |  |

### G66200

CUT RESISTANT LEVEL 6 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.

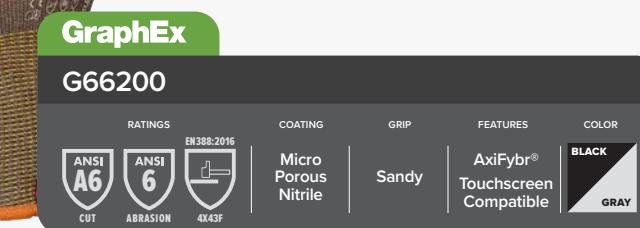

| ORDERING INFORMATION |         |
|----------------------|---------|
| G662002              | S: 7    |
| G662003              | M: 8    |
| G662004              | L: 9    |
| G662005              | XL: 10  |
| G662006              | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

| PHYSICAL PROPERTIES |                      |
|---------------------|----------------------|
| Coating Material    | Micro Porous Nitrile |
| Liner Material      | AxiFybr®             |
| Cuff Type           | Knit                 |
| Fit Type            | Hand-Specific        |
| Length              | 10.2"                |
| Abrasion Level      | ANSI 6               |
| Cut Level           | ANSI A6              |
| Gauge               | 18G                  |



| STANDARDS AND COMPLIANCE |  |
|--------------------------|--|
| EN 420-2003+A1: 2009     |  |
| EN 388:2016              |  |
| FDA 21 CFR 177.1520      |  |
| FDA 21 CFR 177.2600      |  |



# MECHANICAL PROTECTION GLOVES

KARBONHEX® is an advanced, innovative range of ergonomic hand protection that was originally conceptualized, designed and styled specifically for professionals working in the most challenging conditions.



## Models & Ordering Information

### KARBONHEX KX70

PURPOSE BUILT CUT-RESISTANT GLOVES

#### KOMPLEX HANDLING

- 10 gauge cut-resistant, knitted thermal shell
- Sandy foam latex with 3/4 dip
- Elastic knit wrist ensures a comfortable and secure fit



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C244653 | M: 8    |
| C244654 | L: 9    |
| C244655 | XL: 10  |
| C244656 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                  |
|------------------|------------------|
| Coating Material | Latex            |
| Liner Material   | Knitted Fleece   |
| Grip Finish      | Sandy            |
| Fit Type         | Hand-Specific    |
| Length           | 10.2"            |
| Abrasion Level   | ANSI 4 / EN388 1 |
| Cut Level        | ANSI 4 / EN388 B |
| Gauge            | 10G              |



#### STANDARDS AND COMPLIANCE

|              |
|--------------|
| EN 511: 2016 |
| EN 388:2016  |

### KARBONHEX KX84V

PURPOSE BUILT COLD-RESISTANT GLOVES

#### KOMPLEX HANDLING

- 10 gauge cut-resistant, hi-vis, knitted thermal shell
- Sandy foam latex with 3/4 dip
- Elastic knit wrist ensures a comfortable and secure fit



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C334613 | M: 8    |
| C334614 | L: 9    |
| C334615 | XL: 10  |
| C334616 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Latex             |
| Liner Material   | Knitted Fleece    |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 3 / EN388 1  |
| Cut Level        | ANSI A4 / EN388 C |
| Gauge            | 10G               |



#### STANDARDS AND COMPLIANCE

|              |
|--------------|
| EN 511: 2016 |
| EN 388:2016  |

### KARBONHEX KX10

PURPOSE BUILT CUT-RESISTANT GLOVES

#### KOMPLEX HANDLING

- Close-fitting seamless 18-gauge knitted composite shell
- Fusion PU/nitrile palm coating
- Reinforced nitrile patch on thumb crotch



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C365902 | S: 7    |
| C365903 | M: 8    |
| C365904 | L: 9    |
| C365905 | XL: 10  |
| C365906 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                                    |
|------------------|------------------------------------|
| Coating Material | Nitrile / Water-Based Polyurethane |
| Liner Material   | HPPE+                              |
| Grip Finish      | Micro Foam (Pitted)                |
| Fit Type         | Hand-Specific                      |
| Length           | 10.2"                              |
| Abrasion Level   | ANSI 6 / EN388 4                   |
| Cut Level        | ANSI A3 / EN388 C                  |
| Gauge            | 18G                                |



#### STANDARDS AND COMPLIANCE

|             |
|-------------|
| EN 388:2016 |
|-------------|

# KARBONHEX


## Models & Ordering Information

### KARBONHEX KX41

PURPOSE BUILT LIQUID-RESISTANT GLOVES

#### PRECISION HANDLING

- Elastic knit wrist for comfort
- Nitrile palm coating with sandy texture
- Smooth 3/4 dip nitrile base coating
- Superfine seamless 18-gauge knitted nylodex shell

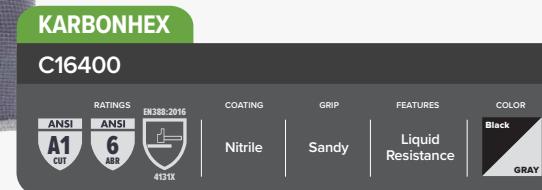

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C164002 | S: 7    |
| C164003 | M: 8    |
| C164004 | L: 9    |
| C164005 | XL: 10  |
| C164006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | Nylon / Spandex   |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 6 / EN388 4  |
| Cut Level        | ANSI A1 / EN388 1 |
| Gauge            | 18G               |



#### STANDARDS AND COMPLIANCE


EN 388:2016

### KARBONHEX KX42

PURPOSE BUILT ABRASION-RESISTANT GLOVES

#### PRECISION HANDLING

- Elastic knit wrist for comfortable and secure fit.
- Sandy nitrile coated palm
- 15g knitted nylodex seamless shell

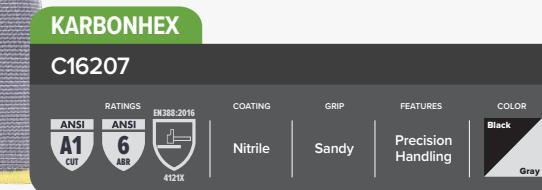

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C162072 | S: 7    |
| C162073 | M: 8    |
| C162074 | L: 9    |
| C162075 | XL: 10  |
| C162076 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | Nylon / Spandex   |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 6 / EN388 4  |
| Cut Level        | ANSI A1 / EN388 1 |
| Gauge            | 15G               |



#### STANDARDS AND COMPLIANCE


EN 388:2016

### KARBONHEX KX43A

PURPOSE BUILT IMPACT-RESISTANT GLOVES

#### PRECISION HANDLING

- Seamless 15-gauge knitted nylodex shell
- Nitrile palm coating with sandy texture
- TPR integrated expansion slots and flex points
- Smooth 3/4 dip nitrile base coating

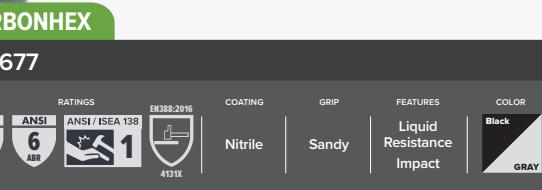

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C166772 | S: 7    |
| C166773 | M: 8    |
| C166774 | L: 9    |
| C166775 | XL: 10  |
| C166776 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | Nylon / Spandex   |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 6 / EN388 4  |
| Cut Level        | ANSI A1 / EN388 1 |
| Gauge            | 15G               |



#### STANDARDS AND COMPLIANCE

EN 388:2016

# KARBONHEX

## Models & Ordering Information

### KARBONHEX KX80

PURPOSE BUILT CUT-RESISTANT GLOVES

#### KOMPLEX HANDLING

- Comfortable elastic knit wrist
- Sandy foam nitrile palm coating
- Lightweight close fitting 18-gauge composite knit shell



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C442802 | S: 7    |
| C442803 | M: 8    |
| C442804 | L: 9    |
| C442805 | XL: 10  |
| C442806 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | HPPE +            |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 4 / EN388 3  |
| Cut Level        | ANSI A4 / EN388 B |
| Gauge            | 18G               |



#### STANDARDS AND COMPLIANCE

|                |
|----------------|
| EN 388:2016    |
| EN 16350: 2016 |

### KARBONHEX KX90

PURPOSE BUILT IMPACT-RESISTANT

#### GLOVES KOMPLEX HANDLING

- Close fitting 18-gauge composite knit shell
- Sandy foam nitrile palm coating
- Full, low profile finger and knuckle TPR guards



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C442702 | S: 7    |
| C442703 | M: 8    |
| C442704 | L: 9    |
| C442705 | XL: 10  |
| C442706 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                   |
|------------------|-------------------|
| Coating Material | Nitrile           |
| Liner Material   | HPPE +            |
| Grip Finish      | Sandy             |
| Fit Type         | Hand-Specific     |
| Length           | 10.2"             |
| Abrasion Level   | ANSI 4 / EN388 4  |
| Cut Level        | ANSI A4 / EN388 D |
| Gauge            | 18G               |



#### STANDARDS AND COMPLIANCE

|              |
|--------------|
| EN 388:2016  |
| EN16350:2016 |

# TotalForm®

## THE ULTIMATE COMBINATION

TotalForm® gloves are designed for exceptional comfort, durability, and performance. Featuring an EcoTek® sustainable nitrile coating, these gloves provide superior fit, fingertip dexterity, and excellent grip. The flexible liner and snug-fit cuff enhance comfort while reducing hand fatigue. With touchscreen compatibility and reliable protection, TotalForm® gloves are built to support various tasks with ease.



## GENERAL PURPOSE BIO-BASED GLOVES

Protect your hands and the environment with a general-purpose glove that combines a liner made of 55% bio-based materials and an EcoTek® sustainable nitrile coating for exceptional comfort. Designed to safeguard both the environment and your hands, this glove features bio-based monomer materials derived from natural sources. The product contains 35% bio-based materials.



# TotalForm®

TF-14BK



| ORDERING INFORMATION     |         |
|--------------------------|---------|
| C141002                  | S: 7    |
| C141003                  | M: 8    |
| C141004                  | L: 9    |
| C141005                  | XL: 10  |
| C141006                  | 2XL: 11 |
| 12 Pairs/Bag 6 Bags/Case |         |

| PHYSICAL PROPERTIES |               |
|---------------------|---------------|
| Coating Material    | Nitrile       |
| Liner Material      | Nylon/Spandex |
| Grip Finish         | Micro Foam    |
| Fit Type            | Hand-Specific |
| Length              | 9.5"          |
| Abrasion Level      | ANSI 4        |
| Cut Level           | ANSI A1       |
| Gauge               | 18G           |

| STANDARDS AND COMPLIANCE |  |
|--------------------------|--|
| EN 420-2003+A1: 2009     |  |
| EN 388: 2016             |  |
| FDA 21 CFR 177.1520      |  |
| FDA 21 CFR 177.2600      |  |
| Oeko-Tex Standard 100    |  |
| Certification            |  |
| ASTM D5526               |  |

# TotalForm®

## Models & Ordering Information

### TF-14BK

#### GENERAL PURPOSE BIO-BASED GLOVES WITH BIOFLEX360™ AND ECOTEK® COATING

- EcoTek® sustainable nitrile coating
- BioFlex360™ Engineered for breathability and ergonomic comfort, with a flexible liner and snug-fit cuff.
- Delivers full protection and all-around performance to reduce hand fatigue.
- Liner is made of 55% bio-based materials
- Superior fingertip dexterity
- Excellent dry grip performance
- Touch screen compatibility



### TF-44BK

#### HIGH PERFORMANCE CUT-RESISTANCE GLOVES WITH BIOFLEX360™, AXIFYBR®, AND ECOTEK® COATING

- EcoTek® sustainable nitrile coating
- BioFlex360™ Engineered for breathability and ergonomic comfort, with a flexible liner and snug-fit cuff.
- Flexible A4 seamless-knit liner designed for increased comfort and reduced hand fatigue
- Superior fingertip dexterity for precision in handling
- Microfoam palm coating provides a secure grip while maintaining comfort during use
- Touch screen compatibility



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C141002 | S: 7    |
| C141003 | M: 8    |
| C141004 | L: 9    |
| C141005 | XL: 10  |
| C141006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |               |
|------------------|---------------|
| Coating Material | Nitrile       |
| Liner Material   | Nylon/Spandex |
| Grip Finish      | Micro Foam    |
| Fit Type         | Hand-Specific |
| Length           | 9.5"          |
| Abrasion Level   | ANSI 4        |
| Cut Level        | ANSI A1       |
| Gauge            | 18G           |



#### STANDARDS AND COMPLIANCE

|                                     |
|-------------------------------------|
| EN 420-2003+A1: 2009                |
| EN 388: 2016                        |
| FDA 21 CFR 177.1520                 |
| FDA 21 CFR 177.2600                 |
| Oeko-Tex Standard 100 Certification |
| ASTM D5526                          |

#### ORDERING INFORMATION

|         |         |
|---------|---------|
| C441002 | S: 7    |
| C441003 | M: 8    |
| C441004 | L: 9    |
| C441005 | XL: 10  |
| C441006 | 2XL: 11 |

12 Pairs/Bag 6 Bags/Case

#### PHYSICAL PROPERTIES

|                  |                |
|------------------|----------------|
| Coating Material | Nitrile        |
| Liner Material   | Nylon/Spandex/ |
| Grip Finish      | Micro Foam     |
| Fit Type         | Hand-Specific  |
| Length           | 9.5"           |
| Abrasion Level   | ANSI 4         |
| Cut Level        | ANSI A4        |



#### STANDARDS AND COMPLIANCE

|                       |
|-----------------------|
| EN ISO 21420: 2020    |
| EN 388: 2016          |
| ASTM D5526            |
| FDA 21 CFR 177.1520   |
| FDA 21 CFR 177.2600   |
| Oeko-Tex Standard 100 |
| ANSI/ISEA 105:2024    |



## CHEMICAL PROTECTION

SW® is advancing materials science and new manufacturing processes to develop chemical protection products with exact safety specifications while maintaining a focus on work comfort and hand health.

# NEWTRILE®

## HANDLE THE HOSTILE

NewTrile® are the industry's first reusable chemical protection gloves with EcoTek® Sustainable Technology. Advanced chemical protection now has a smaller carbon footprint.



## Models & Ordering Information

### NEWTRILE® NU11-RD-ECO-GR

11 MIL UNLINED NITRILE CHEMICAL-RESISTANT

GLOVES WITH ECOTEK®

- 11 mil thickness and 13 inch cuff length for added protection.
- EcoTek® sustainable technology
- Case-hardened exterior for enhanced physical and chemical performance.



### NEWTRILE® NU15-RD-ECO-GR

15 MIL UNLINED NITRILE CHEMICAL-RESISTANT

GLOVES WITH ECOTEK®

- 15 mil thickness and 13 inch cuff length for added protection.
- EcoTek® sustainable technology
- Case-hardened exterior for enhanced physical and chemical performance.



### NEWTRILE® NF15-RD-ECO-GR

15 MIL FLOCK-LINED NITRILE CHEMICAL-RESISTANT

GLOVES WITH ECOTEK®

- 15 mil thickness and 13 inch cuff length for added protection.
- EcoTek® sustainable technology
- Case-hardened exterior for enhanced physical and chemical performance.



#### ORDERING INFORMATION

|         |        |
|---------|--------|
| N501092 | XS: 7  |
| N501093 | S: 8   |
| N501094 | M: 9   |
| N501095 | L: 10  |
| N501096 | XL: 11 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |               |
|-------------------------------|---------------|
| Liner Material                | Unlined       |
| Material                      | Nitrile       |
| Cuff Type                     | Straight      |
| Fit Type                      | Hand Specific |
| Length                        | 13"           |
| Palm Thickness                | 11mil         |
| Tensile Strength Before Aging | 20 MPa        |
| Elongation Before Aging       | 580%          |
| AQL                           | 1.5           |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

#### ORDERING INFORMATION

|         |        |
|---------|--------|
| N505092 | XS: 7  |
| N505093 | S: 8   |
| N505094 | M: 9   |
| N505095 | L: 10  |
| N505096 | XL: 11 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |               |
|-------------------------------|---------------|
| Liner Material                | Unlined       |
| Material                      | Nitrile       |
| Cuff Type                     | Straight      |
| Fit Type                      | Hand Specific |
| Length                        | 13"           |
| Palm Thickness                | 15mil         |
| Tensile Strength Before Aging | 20 MPa        |
| Elongation Before Aging       | 400%          |
| AQL                           | 1.5           |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

#### ORDERING INFORMATION

|         |        |
|---------|--------|
| N515092 | XS: 7  |
| N515093 | S: 8   |
| N515094 | M: 9   |
| N515095 | L: 10  |
| N515096 | XL: 11 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                   |
|-------------------------------|-------------------|
| Liner Material                | Advanced Flocking |
| Material                      | Nitrile           |
| Cuff Type                     | Straight          |
| Fit Type                      | Hand Specific     |
| Length                        | 13"               |
| Palm Thickness                | 15mil             |
| Tensile Strength Before Aging | 20 MPa            |
| Elongation Before Aging       | 300%              |
| AQL                           | 1.5               |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

# CORESAFE®

## NATURAL RUBBER PROTECTION

Coresafe gloves combine natural rubber protection in lined and unlined styles. Experience the comfort, flexibility, and easy donning and doffing of natural rubber for protection against many acids, alkalis, chemicals, gases, and vapors.



# CORESAFE®

## Models & Ordering Information

### CORESAFE® F280

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

#### FLOCK-LINED

- Orange natural rubber latex
- 28mil thick and 13" length for protection
- Raised Diamond grip pattern
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



#### ORDERING INFORMATION

|         |       |
|---------|-------|
| L519012 | XS: 7 |
| L519013 | S: 8  |
| L519014 | M: 9  |
| L519015 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                   |
|-------------------------------|-------------------|
| Liner Material                | Advanced Flocking |
| Material                      | Latex             |
| Cuff Type                     | Straight          |
| Fit Type                      | Hand Specific     |
| Length                        | 13"               |
| Palm Thickness                | 28mil             |
| Tensile Strength Before Aging | 10 MPa            |
| Tensile Strength After Aging  | 7.5 MPa           |
| Elongation Before Aging       | 500%              |
| Elongation After Aging        | 375%              |
| AQL                           | 2.5               |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

### CORESAFE® F28YB

NATURAL RUBBER & NEOPRENE CHEMICAL-RESISTANT

#### GLOVES FLOCK-LINED

- 2-Layer / 2-Color blue neoprene over yellow latex
- 28mil thick and 13" length for protection
- Embossed raised-diamond surface for wet/dry grip
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



#### ORDERING INFORMATION

|         |       |
|---------|-------|
| T519252 | XS: 7 |
| T519253 | S: 8  |
| T519254 | M: 9  |
| T519255 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                   |
|-------------------------------|-------------------|
| Liner Material                | Advanced Flocking |
| Material                      | Latex/Neoprene    |
| Cuff Type                     | Straight          |
| Fit Type                      | Hand Specific     |
| Length                        | 13"               |
| Palm Thickness                | 28mil             |
| Tensile Strength Before Aging | 10 MPa            |
| Tensile Strength After Aging  | 7.5 MPa           |
| Elongation Before Aging       | 500%              |
| Elongation After Aging        | 375%              |
| AQL                           | 2.5               |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

### CORESAFE® U17N

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

#### UNLINED

- Natural rubber latex
- 17mil thick and 12" length for protection
- Fish scale grip pattern
- Unlined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



#### ORDERING INFORMATION

|         |       |
|---------|-------|
| L507032 | XS: 7 |
| L507033 | S: 8  |
| L507034 | M: 9  |
| L507035 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |               |
|-------------------------------|---------------|
| Liner Material                | Unlined       |
| Material                      | Latex         |
| Cuff Type                     | Straight      |
| Fit Type                      | Hand Specific |
| Length                        | 12"           |
| Palm Thickness                | 17mil         |
| Tensile Strength Before Aging | 10 MPa        |
| Tensile Strength After Aging  | 7.5 MPa       |
| Elongation Before Aging       | 500%          |
| Elongation After Aging        | 375%          |
| AQL                           | 2.5           |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

# CORESAFE®

## Models & Ordering Information

### CORESAFE® F13Y

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

#### FLOCK-LINED

- Yellow natural rubber latex
- 13mil thick and 12" length for protection
- Fish scale grip pattern
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



#### ORDERING INFORMATION

|         |       |
|---------|-------|
| L513002 | XS: 7 |
| L513003 | S: 8  |
| L513004 | M: 9  |
| L513005 | L: 10 |

12 Pairs/Bag 12 Bags/Case

#### PHYSICAL PROPERTIES

|                               |                      |
|-------------------------------|----------------------|
| Liner Material                | Cotton Flock         |
| Material                      | Natural Rubber Latex |
| Cuff Type                     | Straight             |
| Fit Type                      | Hand Specific        |
| Length                        | 12"                  |
| Palm Thickness                | 13mil                |
| Tensile Strength Before Aging | 10 MPa               |
| Tensile Strength After Aging  | 7.5 MPa              |
| Elongation Before Aging       | 500%                 |
| Elongation After Aging        | 375%                 |
| AQL                           | 2.5                  |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

### CORESAFE® PC-F22B

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

#### FLOCK-LINED

- 22mil thick and 12.6 inch cuff length for added protection
- Embossed fish scale pattern for wet/dry grip
- Case Hardened for enhanced physical and chemical performance while providing easier and more comfortable donning and doffing
- 12 pairs per poly bag, 12 poly bags per case



#### ORDERING INFORMATION

|         |         |
|---------|---------|
| L518071 | XS: 6   |
| L518072 | S: 7    |
| L518073 | M: 8    |
| L518074 | L: 9    |
| L518075 | XL: 10  |
| L518076 | 2XL: 11 |

2 Pairs/Roll 6 Rolls/Bag  
12 Bags/Case

#### PHYSICAL PROPERTIES

|                |                      |
|----------------|----------------------|
| Liner Material | Cotton Flock         |
| Material       | Natural Rubber Latex |
| Cuff Type      | Straight             |
| Fit Type       | Hand Specific        |
| Length         | 12.6"                |
| Palm Thickness | 21.6 mil             |



#### STANDARDS AND COMPLIANCE

FDA 21 CFR 177.2600

# UNDERSTANDING CUT STANDARDS

## EN388

### EUROPEAN STANDARD

Uses Coup Test as well as the TDM-100 cut machine to test cut level (ISO 13997)



Abrasion 0-4  
Cut (Coup) 0-5 /X  
Tear 0-4  
Puncture 0-4  
Cut (TDM-100) A-F /X



## ANSI

### U.S. STANDARD

Uses TDM-100 cut machine to test cut level (ISO 13997)




Cut (TDM-100) A1 - A9

# UNDERSTANDING CHEMICAL STANDARDS

## ISO 374-1

Specifies resistance to chemical permeation.

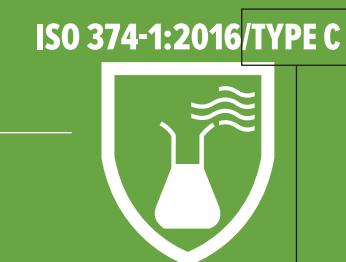

## EN374-5

Indicates glove has passed test methods to protect against micro-organisms and fungi.



Code A - R: glove resistance against specific chemicals

| Code     | Chemical              | CAS number | Class                               |
|----------|-----------------------|------------|-------------------------------------|
| <b>A</b> | Methanol              | 67-56-1    | Primary alcohol                     |
| <b>B</b> | Acetone               | 67-64-1    | Ketone                              |
| <b>C</b> | Acetonitrile          | 75-05-8    | Nitrile composite                   |
| <b>D</b> | Dichloromethane       | 75-09-2    | Chlorinated hydrocarbon             |
| <b>E</b> | Carbon disulphide     | 75-15-0    | Organic compound containing sulphur |
| <b>F</b> | Toluene               | 108-88-3   | Aromatic hydrocarbon                |
| <b>G</b> | Diethylamine          | 109-89-7   | Amine                               |
| <b>H</b> | Tetrahydrofuranne     | 109-99-9   | Heterocyclic ether compound         |
| <b>I</b> | Ethyl acetate         | 141-78-6   | Ester                               |
| <b>J</b> | n-Heptane             | 142-82-5   | Saturated hydrocarbon               |
| <b>K</b> | Sodium hydroxide 40%  | 1310-73-2  | Inorganic base                      |
| <b>L</b> | Sulfuric acid 96%     | 7664-93-9  | Inorganic mineral acid, oxidising   |
| <b>M</b> | Nitric acid 65%       | 7697-37-2  | Inorganic mineral acid, oxidising   |
| <b>N</b> | Acetic acid 99%       | 64-19-7    | Organic acid                        |
| <b>O</b> | Ammonia 25%           | 1336-21-6  | Organic base                        |
| <b>P</b> | Hydrogen Peroxide 30% | 7722-84-1  | Peroxide                            |
| <b>Q</b> | Hydrofluoric acid 40% | 7664-39-3  | Inorganic mineral acid              |
| <b>R</b> | Formaldehyde 37%      | 50-00-0    | Aldehyde                            |

Type A - C: time before chemical breakthrough at the molecular level

| Protection type | Chemical breakthrough time                            |
|-----------------|---|
| <b>TYPE A</b>   | 30 minutes (level 2) against minimum 6 test chemicals |
| <b>TYPE B</b>   | 30 minutes (level 2) against minimum 3 test chemicals |
| <b>TYPE C</b>   | 10 minutes (level 1) against minimum 1 test chemical  |

### COMPARING ANSI/EN388 CUT LEVELS


# Glove Size Selection

THE RIGHT GLOVE IS THE RIGHT SIZE.

## FIT FOR COMFORT: SINGLE-USE


Selecting the right size glove is essential for optimal performance. A glove that fits too snugly put strains on the small hand muscles, which leads to hand fatigue and discomfort.

Don a glove, and with your fingers stretched out, press the center of your palm with your other hand. If the glove is too tight, you will feel resistance and/or an air pocket between the glove and your palm.

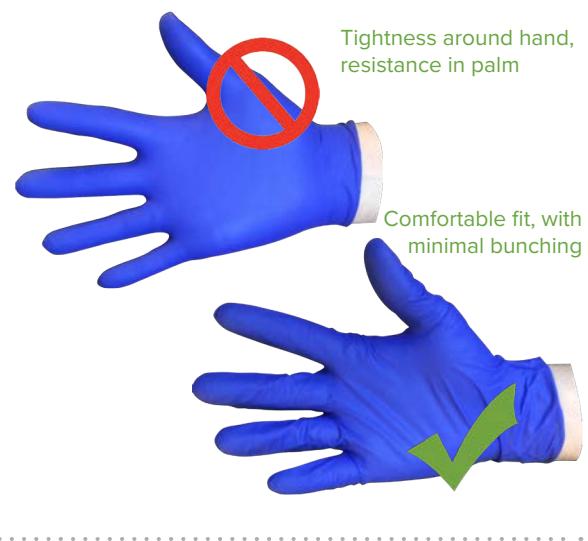

## ALL SW® GLOVES

To get an estimate of the correct size glove, measure the widest part of your hand with the chart to the right. Measure from the saddle of the thumb and index finger to the opposite side of your hand.

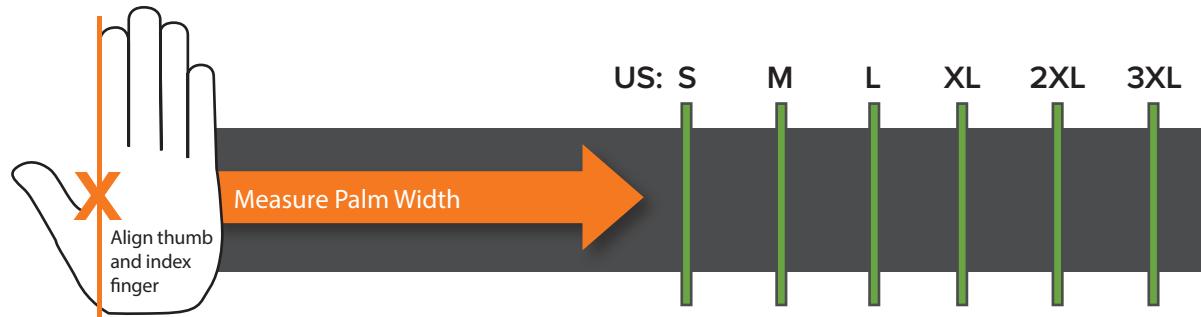

# Specification Guide

| Part Number                                | Product Name | Color         | Finger Mil | Palm Mil | Weight | Outer Surface   | AQL | Packaging      | Page |
|--|--------------|---------------|------------|----------|--------|-----------------|-----|----------------|------|
| <b>Single-Use Powder Free Nitrile Exam</b> |              |               |            |          |        |                 |     |                |      |
| L00620X                                    | TF-065-095NT | Natural       | 5.5mil     | 4.7mil   | 6.5g   | Fully Textured  | 1.5 | 100/Bx 1000/Cs | 20   |
| N30134X                                    | TF-95RB      | Royal Blue    | 4.7mil     | 3.1mil   | 5.0g   | Finger Textured | 1.5 | 100/Bx 1000/Cs | 20   |
| N02740X                                    | TF-12LG      | Light Green   | 5.9mil     | 4.9mil   | 7.5g   | Fully Textured  | 1.5 | 100/Bx 1000/Cs | 20   |
| N02840X                                    | TF-95LG      | Light Green   | 4.0mil     | 3.6mil   | 5.0g   | Finger Textured | 1.5 | 100/Bx 1000/Cs | 22   |
| N19134X                                    | TF-95NV      | Navy          | 3.5mil     | 2.4mil   | 3.8g   | Finger Textured | 1.5 | 200/Bx 2000/Cs | 22   |
| N19188X                                    | TF-95BK      | Black         | 3.5mil     | 2.4mil   | 3.8g   | Finger Textured | 1.5 | 200/Bx 2000/Cs | 22   |
| N09134X                                    | TF-95BL      | Blue          | 3.5mil     | 2.4mil   | 3.8g   | Finger Textured | 1.5 | 250/Bx 2500/Cs | 24   |
| N20075X                                    | PF-95HO      | Hi-Viz        | 5.5mil     | 5.0mil   | 6.5g   | Finger Textured | 1.5 | 100/Bx 1000/Cs | 30   |
| N20041X                                    | PF-95LG      | Light Green   | 5.5mil     | 5.0mil   | 6.5g   | Finger Textured | 1.5 | 100/Bx 1000/Cs | 30   |
| N71688X                                    | PF-95BK      | Black         | 5.5mil     | 5.0mil   | 6.5g   | Finger Textured | 1.5 | 100/Bx 1000/Cs | 30   |
| N20036X                                    | PF-95TL      | Teal          | 5.5mil     | 5.0mil   | 6.5g   | Finger Textured | 1.5 | 100/Bx 1000/Cs | 32   |
| N18947X                                    | PF-95GW      | Green / White | 5.5mil     | 5.0mil   | 6.5g   | Fully Textured  | 1.5 | 50/Bx 500/Cs   | 32   |
| N70034X                                    | PF-95IN      | Indigo        | 5.5mil     | 5.0mil   | 6.5g   | Finger Textured | 1.5 | 100/Bx 1000/Cs | 32   |
| N99175X                                    | PF-95OR      | Orange        | 5.9mil     | 5.1mil   | 7.5g   | Fully Textured  | 1.5 | 100/Bx 1000/Cs | 34   |
| N10655X                                    | PF-95BL      | Blue          | 6.9mil     | 6.1mil   | 8.5g   | Fully Textured  | 1.5 | 50/Bx 500/Cs   | 34   |
| N26050X                                    | PF-95GY      | Gray          | 8.2mil     | 6.2mil   | 8.8g   | Fully Textured  | 1.5 | 50/Bx 500/Cs   | 34   |
| N12736X                                    | PF-12TL      | Teal          | 7.0mil     | 6.2mil   | 10.7g  | Finger Textured | 1.5 | 50/Bx 500/Cs   | 36   |
| N18817X                                    | PF-12WG      | White / Green | 7.5mil     | 6.0 mil  | 10.3g  | Finger Textured | 1.5 | 100/Bx 1000/Cs | 36   |
| N90975X                                    | PF-12OR      | Orange        | 11.2mil    | 8.0mil   | 13.3g  | Fully Textured  | 1.5 | 50/Bx 500/Cs   | 36   |
| N90955X                                    | PF-12BL      | Blue          | 11.2mil    | 8.0mil   | 13.3g  | Fully Textured  | 1.5 | 50/Bx 500/Cs   | 38   |
| N26088X                                    | MM-11BK      | Black         | 10.1mil    | 8.5mil   | 12.8g  | Fully Textured  | 1.5 | 50/Bx 500/Cs   | 48   |

| Thermoplastic Elastomer (TPE)               |                  |       |        |        |      |                |     |                |    |
|---|------------------|-------|--------|--------|------|----------------|-----|----------------|----|
| P70010X                                     | P-021-098-WT     | White | 2.1mil | 2.1mil | 2.1g | Smooth         | 4.0 | 200/Bx 1000/Cs | 52 |
| P79010X                                     | P-024-098-ECO-WT | White | 3.2mil | 3.2mil | 2.4g | Smooth         | 1.5 | 200/Bx 1000/Cs | 52 |
| <b>Single-Use Powder Free Neoprene Exam</b> |                  |       |        |        |      |                |     |                |    |
| K00040X                                     | PC-045-095GR     | Green | 3.5mil | 2.8mil | 4.4g | Fully Textured | 1.5 | 100/Bx 1000/Cs | 44 |
| K00140X                                     | PC-95GR          | Green | 6.2mil | 4.7mil | 7.9g | Fully Textured | 1.5 | 100/Bx 1000/Cs | 44 |

| Single Use Cleanroom Nitrile Exam |                   |                 |                  |               |           |                |       |                     |               |                         |      |
|-----------------------------------|-------------------|-----------------|------------------|---------------|-----------|----------------|-------|---------------------|---------------|-------------------------|------|
| Part Number                       | Product Name      | Liner Material  | Coating Material | Color         | Cut Level | Abrasion Level | Gauge | Grip Finish         | Fit Type      | Packaging               | Page |
| <b>Cut-Resistant</b>              |                   |                 |                  |               |           |                |       |                     |               |                         |      |
| G45100X                           | GraphEx® G45100   | AxiFybr®        | Nitrile          | Gray / Black  | ANSI A4   | ANSI 5         | 18    | Smooth              | Hand Specific | 12 Pairs/Bag, 6 Bags/Cs | 58   |
| G46200X                           | GraphEx® G46200   | AxiFybr®        | Nitrile          | Gray / Black  | ANSI A4   | ANSI 6         | 18    | Sandy               | Hand Specific | 12 Pairs/Bag, 6 Bags/Cs | 58   |
| G66200X                           | GraphEx® G66200   | AxiFybr®        | Nitrile          | Gray / Black  | ANSI A6   | ANSI 6         | 18    | Sandy               | Hand Specific | 12 Pairs/Bag, 6 Bags/Cs | 58   |
| C24465X                           | KarbonHex KX70    | Knitted Fleece  | Latex            | Gray / Black  | ANSI A2   | ANSI 4         | 10    | Sandy               | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 62   |
| C33461X                           | KarbonHex KX84V   | Knitted Fleece  | Latex            | Gray / Yellow | ANSI A3   | ANSI 3         | 10    | Sandy               | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 62   |
| C36590X                           | KarbonHex KX10    | HPPE +          | Nitrile / PU     | Gray / Black  | ANSI A3   | ANSI 6         | 18    | Micro Foam (Pitted) | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 62   |
| C16400X                           | KarbonHex KX41    | Nylon / Spandex | Nitrile          | Gray / Black  | ANSI A1   | ANSI 6         | 18    | Sandy               | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 64   |
| C16207X                           | KarbonHex KX42    | Nylon / Spandex | Nitrile          | Gray / Black  | ANSI A1   | ANSI 6         | 15    | Sandy               | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 64   |
| C16677X                           | KarbonHex KX43A   | Nylon / Spandex | Nitrile          | Gray / Black  | ANSI A1   | ANSI 6         | 15    | Sandy               | Hand-Specific | 6 Pairs/Bag, 6 Bags/Cs  | 64   |
| C44280X                           | KarbonHex KX80    | HPPE +          | Nitrile          | Gray / Black  | ANSI A4   | ANSI 4         | 18    | Sandy               | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 66   |
| C44270X                           | KarbonHex KX90    | HPPE +          | Nitrile          | Gray / Black  | ANSI A4   | ANSI 4         | 18    | Sandy               | Hand-Specific | 6 Pairs/Bag, 6 Bags/Cs  | 66   |
| C14100X                           | TotalForm TF-14BK | Nylon / Spandex | Nitrile          | Gray / Black  | ANSI A1   | ANSI 4         | 18    | Micro Foam          | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 72   |
| C44100X                           | TotalForm TF-44BK | Nylon/Spandex   | Nitrile          | Gray / Black  | ANSI A4   | ANSI 4         | 18    | Micro Foam          | Hand-Specific | 12 Pairs/Bag, 6 Bags/Cs | 72   |

| Part Number                                      | Product Name    | Liner Material    | Coating Material | Color         | Puncture Level | Abrasion Level | Grip Finish      | Fit Type      | Packaging                | Page |
|--|-----------------|-------------------|------------------|---------------|----------------|----------------|------------------|---------------|--------------------------|------|
| <b>Chemical-Resistant - Nitrile</b>              |                 |                   |                  |               |                |                |                  |               |                          |      |
| N50109X  | NewTrile® U11   | N/A               | N/A              | Green         | ANSI 2         | ANSI 6         | Recessed Diamond | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 78   |
| N50509X  | NewTrile® U15   | N/A               | N/A              | Green         | ANSI 3         | ANSI 6         | Recessed Diamond | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 78   |
| N51509X  | NewTrile® F15   | Advanced Flocking | N/A              | Green         | ANSI 3         | ANSI 6         | Recessed Diamond | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 78   |
| <b>Chemical-Resistant - Natural Rubber Latex</b> |                 |                   |                  |               |                |                |                  |               |                          |      |
| L50703X  | CoreSafe® U17N  | N/A               | N/A              | Natural       | ANSI 1         | ANSI 3         | Fish Scale       | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 82   |
| L51901X  | CoreSafe® F280  | Cotton Flock      | N/A              | Orange        | ANSI 2         | ANSI 3         | Raised Diamond   | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 82   |
| T51925X  | CoreSafe® F28YB | Cotton Flock      | Neoprene         | Yellow / Blue | ANSI 1         | ANSI 3         | Raised Diamond   | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 82   |
| L51807X  | PowerChem® F22B | Cotton Flock      | N/A              | Blue          | ANSI 2         | ANSI 3         | Sandy            | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 84   |
| L51300X  | CoreSafe® F13Y  | Cotton Flock      | N/A              | Yellow        | ANSI 1         | ANSI 3         | Fish Scale       | Hand Specific | 12 Pairs/Bag, 12 Bags/Cs | 84   |



[swssglobal.com](http://swssglobal.com)



v.012026.1